

58mm High Speed Pos termiczny Drukarka pokwitowań

(Model: OCPP-586)

Specification:

| | |
|--------------------------|---|
| Metoda drukowania | termiczna |
| Gęstość druku | 384dots / linii (203dpi) |
| Rozmiar znaków | 384dots / linia, ANK charakter, Czcionka: A: 12 * 24dots, 1,5 (w) * 3,0 mm (H) Uproszczony / tradycyjne: 24 * 24dots, 3,0 (w) * 3,0 (H) mm |
| Rodzaj kodu kreskowego | JAN13(EAN13)JAN8(EAN8)CODE39 QRCode (funkcja opcjonalna) |
| Polecenie drukowania | Kompatybilny z Epson ESC / POS |
| Język | OEM437 / Katakana / OEM850 / OEM860 / OEM863 / OEM865 / Europa Zachodnia / grecki / hebrajski / East Europe / Iran / WPC1252 / OEM866 / OEM852 / OEM858 / IranII / łotewski / arabski / PT151,1251 / OEM747 / WPC1257 / Wietnam / OEM864 / hebrajski / WPC1255 / Thai |
| prędkość druku | 90 mm / s |
| Szerokość papieru | 57,5 ± 0,5 mm |
| Grubość papieru | 0.06-0.08mm |
| MCBF (życie) | 50 km |
| Wymiar | 190 * 132 * 119mm |
| Waga brutto | 1.2kg |
| Auto Cutter | instrukcja frez |
| Czujnik | Koniec papieru poblizu czujnika, papier Koniec Sensor, czujnik otwarcia pokrywy |
| rolka papieru | Φ75mm |
| Berło | RS-232C, równoległy, USB, LAN |
| Kierowca | Win 9X, Win 2000, Wygraj 2003, Win XP, Win Vista, Win 7 Win8 Win10 kompatybilny z ESPON |
| Zasilanie drukarki | DC12V / 3A |
| Kontrola szuflady | DC 12V / 1A |
| Temperatura pracy | 0-45°C, Wilgotność: 10-80% |
| Temperatura oszczędzania | -10-60°C, Wilgotność: 10-90% |

Szczegóły Produktu:



**58mm Thermal
Receipt Printer**
OCPP-586



Product Picture





Features

Simple but not easy

Small size and elegant design





Can drive cash drawer



Compatible with ESPON



High printing speed



Printing head life: 50KM



All-round show





Application Area

Food delivery, restaurant, Traffic Citation,
Logistics, Transportation, Warehouse management,
Delivery, Illegal Parking Ticket, Drugstore,
Price Tag, Retail/Farm



Parameter

| | |
|------------------|---|
| Printing Method | Direct thermal |
| Print Density | 384dots/line (203DPI) |
| Character Size | 384dots/line, ANK character, Font: A: 12*24dots, 1.5(W)*3.0(H) mm Simplified/Traditional: 24*24dots, 3.0(W)*3.0(H)mm |
| Barcode Type | JAN13 (EAN13) JAN8 (EAN8) CODE39 |
| Printing Command | Compatible with EPSON ESC/POS |
| Language | OEM437/Katakana/OEM850/OEM860/OEM863/OEM865/West Europe/ Greek/Hebrew/East Europe/Iran/WPC1252/OEM866/OEM852/ OEM858/IranII/Latvian/ Arabic/PT151,1251/OEM747/ WPC1257/Vietnam/OEM864/Hebrew/WPC1255/Thai |
| Printing Speed | 90mm/sec |
| Paper Width | 57.5±0.5mm |
| Paper Thickness | 0.06-0.08mm |
| MCBF(life) | 50km |
| Dimension | 190*132*119mm |
| Gross Weight | 1.2KG |
| Auto Cutter | manual cutter |
| Sensor | Paper Near End Sensor, Paper End Sensor, Cover open sensor |
| Roll Paper | Φ75mm |
| Interface | RS-232C, Parallel, USB, LAN |


| | |
|---------------------|--|
| Driver | win 9X, win 2000, win 2003, win XP, win vista, win 7 compatible with ESPON |
| Printer Supply | DC12V/3A |
| Cash Drawer Control | DC12V/1A |
| Working Temperature | 0-45°C, Humidity: 10-80% |
| Saving Temperature | -10-60°C, Humidity: 10-90% |

Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.
- E Tear-off the paper correctly.

Connection

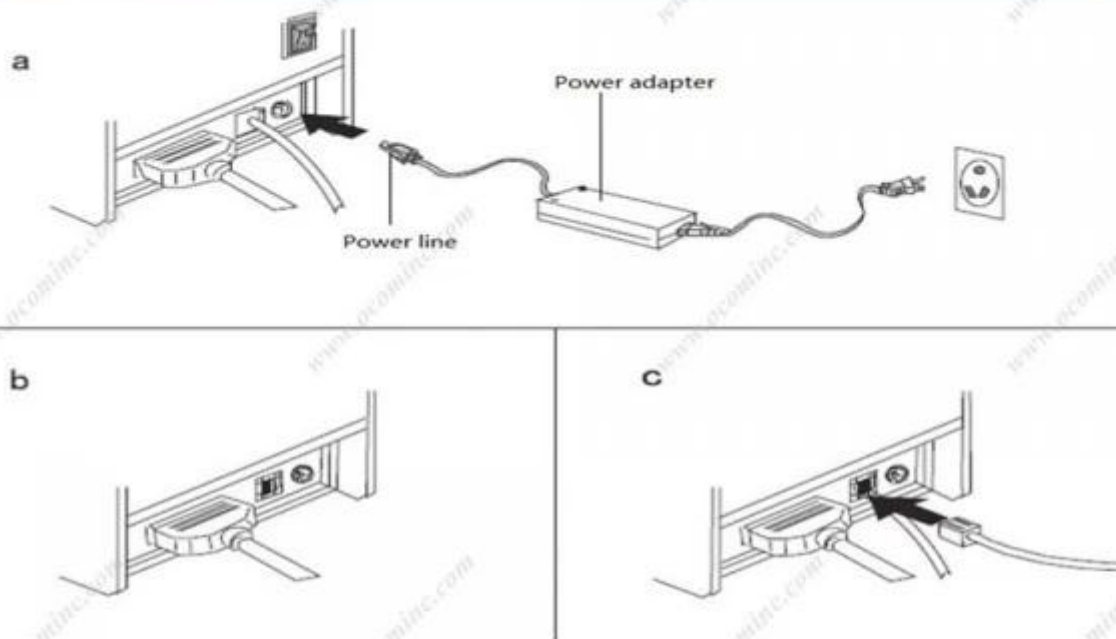

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- c. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on

3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow
8. L/C

Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com, Together we quest for the best.



Odpowiednie dokumenty:

*[Specyfikacja](#)

*[Podręcznik programu](#)

*[Instrukcja obsługi](#)

*[Sterownik dla wiatremOWS](#)

*[Sterownik dla systemu Linux](#)

*[Parametry Printer Setting Tools](#)

*[Printdemo USB\(Application Software demo\)](#)

*[SDK dla Android](#)

*[Płyta CD Akta](#)