

58mm drukarka pokwitowań termicznych z automatyczną przecinarką OCPP-58C-L Port LAN / Ethernet (Numer modelu: OCPP- 58C-L)

1.Cechy:

Big gear design, super odporny na zużycie
Modny wygląd
Wysoka prędkość drukowania do 120 mm / s dla tekstu lub obrazu
W pełni kompatybilny z EPSON ESC / POS dowództwo
Długa żywotność, strpodlewanie żywotność głowicy: 50KM
ZAnożyce do cięcia
Obsługa drukowania logo NV
Sobstługuj wiele języków
Obsługa wielu typów kodów paskowych
Wsparcie kick szuflady gotówki
Wsparcie Win 9X / Win ME / WIN2000 / Win 2003 / Win NT / Win XP / Win Vista / Win7 / Win8

2.Specyfikacja:

| | |
|-------------------------------------|---|
| Metoda drukowania | Bezpośrednie termiczne |
| Gęstość druku | 384dots / line |
| Rozmiar postaci | ANK, Czcionka A: 12x24dots Czcionka B: 9x17dots Uproszczony / tradycyjny chiński: 24x24doty |
| Kod kreskowy | UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODABAR / ITF / CODE39 / CODE93 / CODE128 |
| Berło | Parallmil/Szeregowy / USB/ LAN |
| Moc Dostawa | DC 12V==2.6ZA |
| Szuflada kasowa | DC 12V==1A |
| Żywotność głowicy drukującej | 50 kilometrów |
| Warunki pracy | Temperatura (0 ~ 45 stopni C), wilgotność (10 ~ 80%) |
| Przechowywanie Warunki | Temperatura (-10 ~ 60 stopni C), wilgotność (10 ~ 90%) |
| Szybkość drukowania | 120 mm / s |
| Szerokość papieru | 57,5±0,5 mm |
| Papier średnica zewnętrzna | 65 mm |
| Grubość papieru | 0,06 ~ 0,08 mm |
| Waga | Ni waga: 1,5 kg, masa brutto: 2,5 kg |
| Wymiar | 199 * 132 * 111,5 mm |
| Kierowca | Win9X / Win ME / Win2000/ Win2003/ WinNT / Win XP/Zdobyć Widok/Win7/ Zdobyć8 |
| Nóż | ZAnożyce do cięcia |
| Dowództwo | Kompatybilny z EPSON ESC / POS |
| Odstępy między wierszami | 3,75 mm (można zmienić za pomocą polecenia) |



**58mm Thermal Printer
with Auto-cutter and Big Gear
OCPP-58C**



Product Picture





Features

Simple but not easy

Fashionable appearance design





Big gear design, superwear resistant



High printing speed up to 120mm/s
for text or image



Support multiple languages

Long life, printing head life: 50KM



All-round show





Application Area

Food delivery, restaurant, Traffic Citation,
Logistics, Transportation, Warehouse management,
Delivery, Illegal Parking Ticket, Drugstore,
Price Tag, Retail/Farm



Parameter

Parameter

| | |
|------------------------|---|
| Print method | Direct thermal |
| Print density | 384dots/line |
| Character size | ANK, Font A: 12x24dots Font B: 9x17dots Simplified/traditional Chinese: 24x24dots |
| Bar code | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/CODE93/CODE128 |
| Interface | Parallel/Seris/USB/LAN |
| Power supply | DC 12V==2.6A |
| Cash drawer | DC 12V==1A |
| Printing head lifetime | 50 kilometers |
| Operating Conditions | Temperature (0~45 Deg C), humidity (10~80%) |
| Storage Conditions | Temperature (-10~60 Deg C), humidity (10~90%) |
| Print speed | 120mm/s |
| Paper width | 57.5±0.5mm |
| Paper | |




| | |
|-------------------|--|
| external diameter | 65mm |
| Paper thickness | 0.06~0.08mm |
| Weight | Net weight: 1.5KG, Gross weight: 2.5kg |
| Dimension | 199*132*111.5mm |
| Driver | Win9X/Win ME/Win2000/Win2003/WinNT/Win XP/Win Vista/Win7/ Win8 |
| Cutter | Auto cutter |
| Command | Compatible with EPSON ESC/POS |
| Line Spacing | 3.75mm(Can change through command) |

Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.

Connection

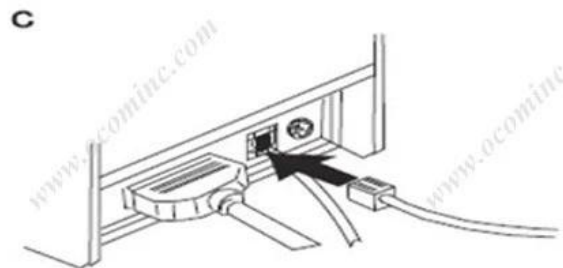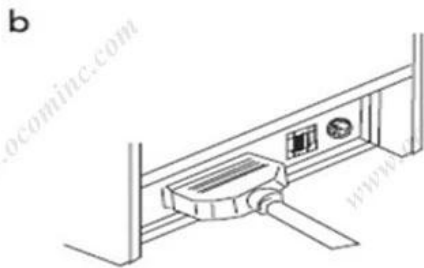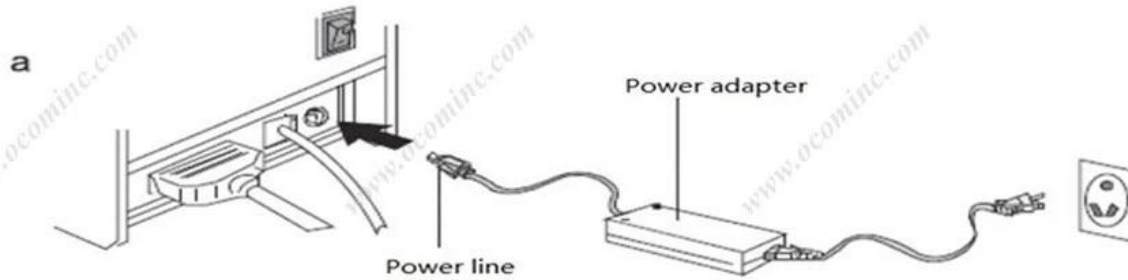

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- c. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow

Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com,
Toaether we auest for the best.



Kontakt: Harold Hu

OCOM Technologies Limited

Adres: 4 / F, blok 10, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, Chiny;

Witryna: www.ocominc.com, www.possolution.com.cn;

E-mail: sales14@ocominc.com;

Skype: [sales14@ocominc.com](https://www.skype.com/people/sales14@ocominc.com)

MSN: ocomsales14@hotmail.com;

Whatsapp: 86,18948789890;

Wechat: 18948789890 (ocomsales14);

Mobile: 86.18948789890;

QQ: 1467261417;

Tel: 0086.755.86053207-814;

Faks: 0086.755.86053207-868.