### 58mm Thermal Receipt Printer Auto Cutter Used For POS System (OCPP-58C-U)

(Model Number: OCPP- 58C-U)

#### 1.Features:

Big gear design, super wear resistant

Fashionable appearance design

High printing speed up to 120mm/s for text or image

Fully compatible with EPSON ESC/POS command

Long life, printing head life: 50KM

Auto cutter

Support NV Logo download print

Support multiple languages

Support multiple bar code types

Support cash drawer kick out

Support Win 9X/Win ME/WIN2000/Win 2003/Win NT/Win XP/Win Vista/Win7/Win8

### 2. Specification:

| Print method            | Direct thermal  |
|-------------------------|---|
| Print density           | 384dots/line  |
| Character size          | ANK, Font A: 12x24dots  |
|                         | Font B: 9x17dots  |
|                         | Simplified/traditional Chinese: 24x24dots                             |
| Bar code                | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/CODE93/CODE128 |
| Interface               | Parallel/Serial/USB/LAN   |
| Power supply            | DC 12V==2.6A  |
| Cash drawer             | DC 12V==1A  |
| Printing head lifetime  | 50 kilometers   |
| Operating Conditions    | Temperature (0~45 Deg C), humidity (10~80%)                           |
| Storage Conditions      | Temperature (-10~60 Deg C), humidity (10~90%)                         |
| Print speed             | 120mm/s   |
| Paper width             | 57.5±0.5mm  |
| Paper external diameter | 65mm  |
| Paper thickness         | 0.06~0.08mm   |
| Weight                  | Net weight: 1.5KG, Gross weight: 2.5kg                                |
| Dimension               | 199*132*111.5mm   |
| Driver                  | Win9X/Win ME/Win2000/Win2003/WinNT/Win XP/Win Vista/Win7/ Win8        |
| Cutter                  | Auto cutter   |
| Command                 | Compatible with EPSON ESC/POS   |
| Line Spacing            | 3.75mm(Can change through command)                                    |

#### 3. Pictures:







## **Features**

# Simple but not easy

Fashionable appearance design














## **Application Area**

Food delivery, restaurant, Traffic Citation, Logistics, Transportation, Warehouse management, Delivery, Illegal Parking Ticket, Drugstore,









| Print<br>method                 | Direct thermal  |  |
|---------------------------------|---|--|
| Print<br>density                | 384dots/line  |  |
| Characte<br>r size              | ANK, Font A: 12x24dots Font B: 9x17dots Simplified/traditional Chinese: 24x24dots |  |
| Bar code                        | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/COD<br>E93/CODE128         |  |
| Interface                       | Parallel/Serial/USB/LAN   |  |
| Power supply                    | DC 12V==2.6A  |  |
| Cash<br>drawer                  | DC 12V==1A  |  |
| Printing<br>head<br>lifetime    | 50 kilometers   |  |
| Operatin<br>g<br>Condition<br>s | Temperature (0~45 Deg C), humidity (10~80%)                                       |  |
| Storage<br>Condition            | Temperature (-10~60 Deg C), humidity (10~90%)                                     |  |
| Print<br>speed                  | 120 mm/s  |  |
| Paper<br>width                  | 57.5±0.5mm  |  |
| Paper                           |   |  |

| external<br>diameter | 65mm   |  |
|----------------------|--|--|
| Paper<br>thickness   | 0.05~0.08mm  |  |
| Weight               | Net weight: 1.5KG, Gross weight: 2.5kg                         |  |
| Dimensio<br>n        | 199*132*111.5mm  |  |
| Driver               | Win9X/Win ME/Win2000/Win2003/WinNT/Win XP/Win Vista/Win7/ Win8 |  |
| Cutter               | Auto cutter  |  |
| Comman               | Compatible with EPSON ESC/POS                                  |  |
| Line<br>Spacing      | 3.75mm(Can change through command)                             |  |


## **Paper Roll Installation**




A Open the printer cover.

- B (Install the roller in the roll paper, and put them into the printer.
- Pull out some paper outside the printer and then close the printer cover.
- Close the top cover. Press the printer cover to avoid error position of roll paper.

## Connection

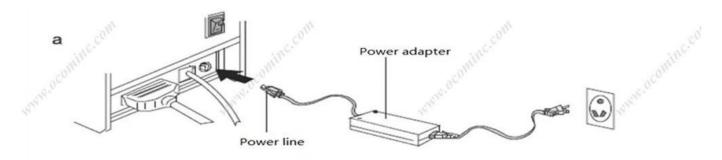

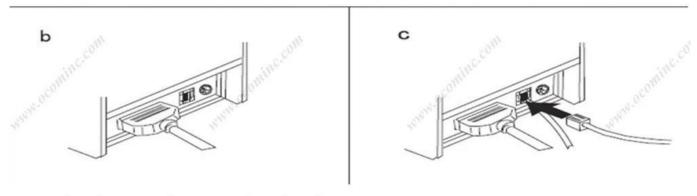

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- C. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

### Shipping and payment

- 1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
- 2. EXPRESS: around 3-7 working days to arrive
- 3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
- 4. By sea: depend on which destination port
- 5. T/T
- 6. Western Union
- 7. Escrow

## **Company Profile**



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com,

Together we guest for the best.











