

# China rugged heavy duty desktop sticker paper thermal label barcode printer

(M/N:OCBP-008)

## Features:

Dual-motor, side clamshell design;

200mm/s (8"/s) Printing Speed, make daily task more efficient;

300m ribbon capacity, up to 214mm (8.4")OD label capacity design;

8MB Flash and 8MB SRAM memory;

Compatible with TSPL/EPL/ZPL/DPL, perfect alternative for your barcode project;

Standard USB2.0 port;

Bartender Label edit software & Windows driver available;

## Detailed Specifications:

Resolution	8 dots/mm(203 dpi)
Max.print speed	200 mm (8") / s
Max.print width	104 mm (4.09")
Max.print length	1778 mm (70")
Media width	25.4-115mm
Interface	Standard: USB 2.0/TF Card ; Optional: RS-232 / Ethernet / WIFI / Bluetooth
Label length	10~1178mm
Resolution	8 dots/mm(203dpi)
Printing method	Thermal Transfer/ Direct Thermal
Max.print speed	200 mm (8")/s
Max.print width	104 mm (4.09")
Max.print length	1778 mm (70")
Media type	Continuous, gap, black mark, fan-fold and punched hole
Media width	25.4 ~ 115 mm
Media thickness	0.06~0.25mm
Label length	10 ~ 1778mm
Label roll capacity	127 mm (5") OD (outside holder)
Enclosure	ABS plastic
Physical dimension	246 mm□L□× 223 mm □W□× 204 mm□H□
Weight	2.47kg
Processor	32-bit RISC CPU

Memory	8MB Flash Memory, 8MB SDRAM, Mro SD card reader for Flash memory expansion, up to 4 GB
Interface	Standard: USB 2.0/TF Card ; Optional: RS-232 / Ethernet / WIFI / Bluetooth
Barcode	1D bar code Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11 2D bar code PDF-417, Maxicode, DataMatrix, QR code, Aztec
Factory Options	①RS-232(2400-115200 bps) ②Bluetooth ③ WiFi ④Real time clock ⑤ Ethernet ⑥ LCD/LED(Must choose one)
Safety Standard	FCC, CE, CB, CCC
Environment condition	Operation condition: -10 ~ 50°C(14~122°F), 10 ~ 90% non-condensing Storage condition: -40 ~ 60°C(-40~140°F), 10 ~ 90% non-condensing



OCBP-008





OCBP-008






OCBP-008





OCBP-008

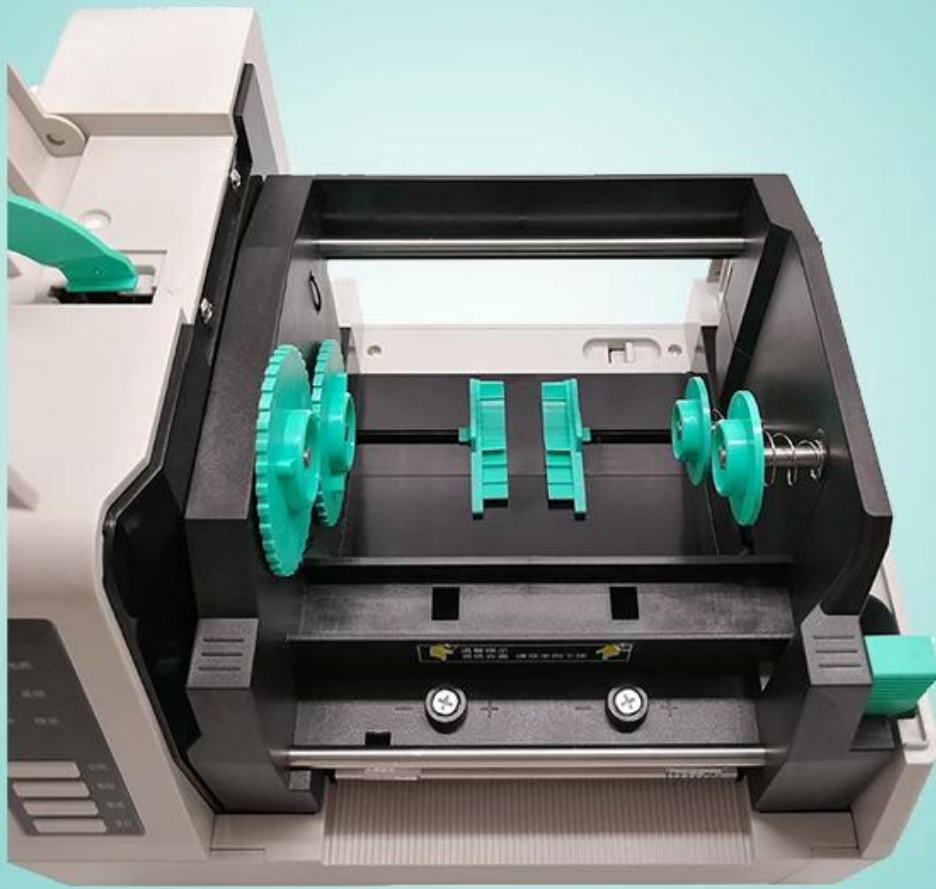



OCBP-008





OCBP-008







OCBP-008





OCBP-008

