

58mm embedded thermal printer (M/N:OCKP-5802)

- | 90mm/S printing speed,
- | 60mm diameter oversized paper house
- | Support multiple countries language code pages
- | Support graphical printing
- | Support NV logo storage and printing
- | Support multiple barcode printing

Printing method	Direct thermal
Printing speed	90mm/s
Paper roll diameter	Φ60mm
Column capacity	384 dots/line
Paper thickness	0.06~0.08mm
Character	GB2312 and multiple countries language code pages
Character size	ANK,Font A:1.5×3.0mm(12×24 dots) Font B:1.1×2.1mm(9×17 dots)
Barcode types	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128
Input buffer	32K bytes
NV Flash	64K bytes
Power adaptor	DC 12V/2.6A
Cash drawer output	DC 12V/1A
Weight	0.163KG
Dimensions	111.3×89×68mm (D×W×H)
Work environment	Temperature (0~45) humidity(10~80%)
Storage environment	Emperature(-10~60°C) humidity(10~80%)
Printer head life	50KM




OCKP-5802





OOCKP-5802

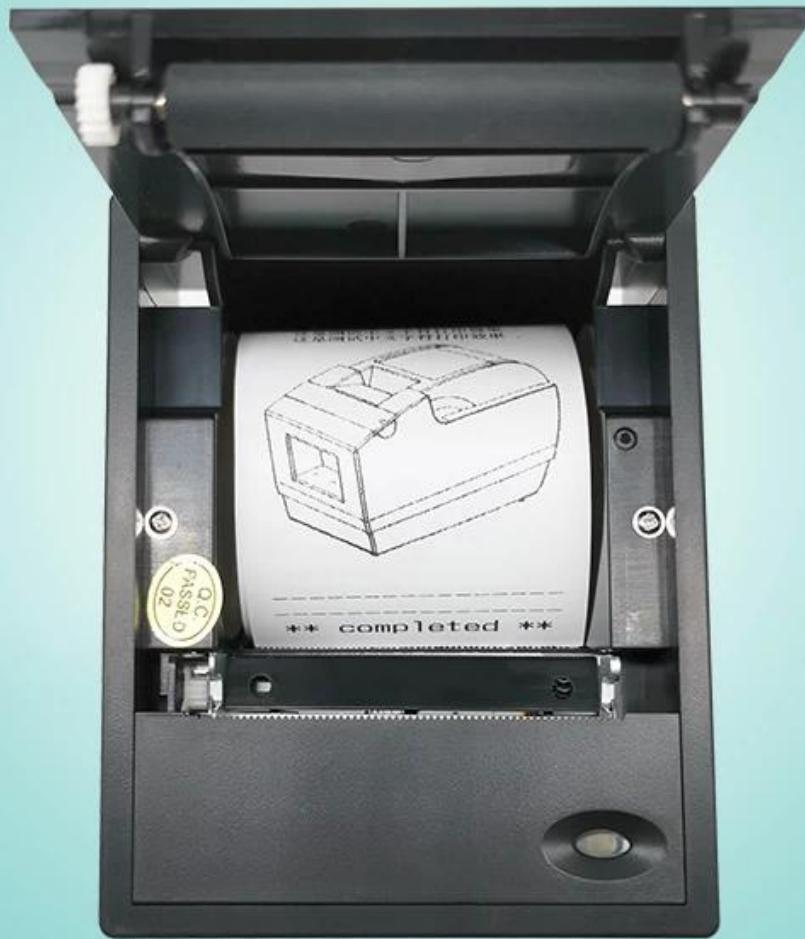

ISO **FCC** CE 

The image shows several international compliance logos: ISO (International Organization for Standardization), FCC (Federal Communications Commission), CE (Conformité Européenne - European Conformity), and RoHS (Restriction of Hazardous Substances).