

Features:

Android 14 with GMS certification, 2G/3G/4G full netcom

TSMC's 6nm process reduces power consumption by 45%-50%

High-speed storage chip, better performance than traditional chips 800%

Professional optical design engine, 1.3M Pixel (Datalogic)

One-dimensional code average 13 ms

Two-dimensional code average 13 ms

Anti-collision corner design

High performance PC+GF shell material

36 drops from 1.5 meters without breaking the screen

5000mAh large battery can be removable, continue working 15hrs

Specification

Model	OCBS-M93
OS	Android 14 with GMS certification
CPU	Qualcomm6225,Octa-Core , 2.8GHz
MEMORY	4G RAM+64G ROM
Extend Slot	Micro SD slot*1, support up to 256GB
	Nano SIM card slot*2
Power supply	5V/2.4A power adaptor
PC Communication	Type C USB 2.0,support OTG and charging
LED	Charging, Scan and System status
Charging Time	0-90%<3 hours
Operation Duration	15 hours
Data collection	
Scan Engine	Datalogic Authorized E3140
2D	Aztec Code; China Han Xin Code; Data Matrix; MaxiCode;
	Micro QR Code; QR Code; EAN/JAN Composites; GS1 DataBar Composites;
	GS1 DataBar Expanded Stacked; GS1 DataBar Stacked;
	GS1 DataBar Stacked Omnidirectional; MacroPDF;
	MicroPDF417; PDF417; UPC A/E Composites
1D	Auto discriminates all standard 1D codes including GS1 DataBar™ linear codes.
Post	Australian Post; British Post; China Post; IMB; Japanese
	Post; KIX Post; Korea Post; Planet Code; Postnet; Royal
	Mail Code (RM4SCC)
Wireless connectivity	
WLAN	802.11 ac/a/b/g/n,wifi dual band
WWAN	GSM: B3/B8
	UMTS: B1/B8
	FDD_LTE:B1/B3/B5/B7/B8
	TDD_LTE:34/38/39/40/41
Bluetooth	BLE 5.0
GPS	GPS/Glonoss/Galileo/Beidou,Assisted GPS
Physical Specifications	
LCD	6 inch IPS HD screen
Touch	GFF Capacitive Touch, Dragontrail Glass
Camera	Auto focus 13Mega, with flash LED,front 5Mega camera for option
key	Left/Right Scan Key,volume +/- key,power key
	Back, HOME, Switch on the screen
Receiver	Support
Speaker	Min 100db at 10cm-1KHz Voice
Mic	Noise Reduction Mic
Charging IO	USB type-C,
	Charging cradle
Battery	Removable 5000mAh
Battery life	500 cycle> 80%
Dimension	170*78*15mm
Weight	290g

Package	
Weight	Gross: 770g
Package	195*108*55mm
Environmental Specifications	
Operation Temperature	-25°C ~ +55°C
Storage Temperature	-30°C ~ +70°C
Humidity	5% ~ 95%
Drop	1 loop includes 6 faces and 4 corners. 1.5m stell, 3 loops□30 drops□ 1.8m with rubber boot, stell, 6 loops□60 drops□
IP	IP65
ESD	±8kV Contact, ±15kV Air
Accessories	
Optional	Single host and battery charger*1
	Silicon rubber case*1
	4 in 1 host device charger*1
	4 in 1 battery charger*1
	Spare battery *1
	Wrist strap*1
	Shoulder belt*1

18

OEM/ODM

YEARS

Leading One-stop supplier for POS related products with
fortune global 500 companies qualified

[CLICK MORE](#)

Certification



Professional Sales




Exhibition



Customers



Received By Customers

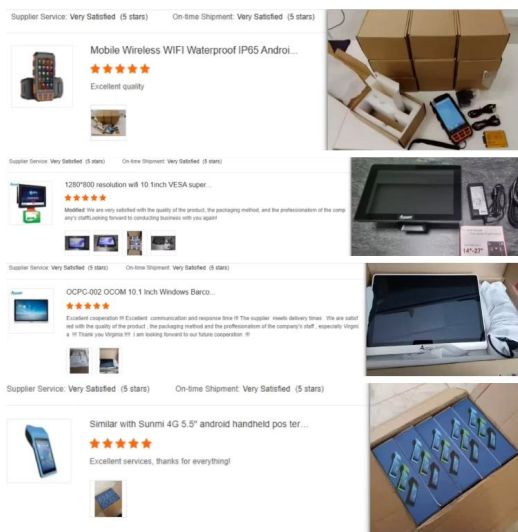

OCOM Technologies Limited

3A01, 4F, Block 2, Nanyou 4th Industrial Park, Nanshan Ave,
Nanshan, Shenzhen 518054, China
ocom@ocominc.com, info@possolution.com.cn
+86 755 86053207
+86-13352932860



Contact Us