OCPP-80E-URL 80mm POS Receipt Thermal Printer With Auto Cutter For Restaurant (Model No.: OCPP-80E-URL)

A.Features:

- 1.Desktop or wall-mounted type for option.
- 2. Supports multi 1D barcodes and 2D codes printing.
- 3.100M Ethernet port, ultra high speed data transmission.
- 4. Supports 256KB NV Logo storage and 2M big buffer memory.
- 5. Supports order reminding function, compatible with OPOS driver.and black mark detection(Optional)
- 6. Supports printing status monitor and anti-losing order function.

B.Technical parameters

Ī	Printing method:	Direct thermal
ı	Printing speed:	200mm/s
	Roll width:	79.5±0.5mm
	Print diameter:	Φ80mm
	Paper thickness:	0.06-0.08mm
	Column capacity:	576dots/line512 Dots/line
	Line's pacing :	3.75mm[Adjustable by commands[]
	Print command:	Compatible with the ESC/POS command
	Interface type:	USB+25P serial/ 36P parallel port/ LAN
	Cutters life:	1million cuts
	Print head life:	100 km
	Input buffer :	2048Kbytes
	NV Flash:	256Kbytes
	Power adaptor:	AC110V/240V[]50~60Hz
	Power supply:	DC 24V/2.5A
	Cash drawer supply:	DC 24V/1A
	Work environment:	Temperature(0[]45) humidity(10[]80%)[]Non- condense[]
	Work environment:	Temperature(0-45) degree centigrade, humidity(10-80%) Non- condense
	Storage environment:	Temperature(-10[]60°C); Humidity(10[]90%)
	Character size:	ANK[FontA:1.5*3.0mm/ FontB[]1.1*2.1mm
	Barcode:	UPC-A/UPC-E/JA[]EAN13[]/JAN8[]EAN8/CODE39/ITF
		/CODE93/CODE128/QRCode/PDF417 (options)
	Characters:	PC347[]Standard Europe[][]Katakana[]PC850[]Multilingual[][PC860[]Portuguese[][PC863[]Canadian-French[]]PC865
		[]Nordic][]West Europe]Greek[]Hebrew[]East Europe[]Iran[]WPC1252[]PC866[]Cyrillic#2[]]PC852[]Latin2[]]
-		PC858[]ranll[]Latvian[]Arabic[]PT151[]1251[]
-	Physical characteristics[Weight: 1.25Kg; Appearance size: 190×145×143mm (length * width * height)

C.Pictures



80mm Thermal Printer with Auto Cutter

OCPP-80E













Product Picture



Reliable with good price



Supports black mark detection and order reminding function, compatible with OPOS driver;







100M Ethernet port, ultra high speed data transmission;



Supports 256KB NV Logo storage and 2M big buffer memory;



Desktop or wall-mounted type for option;







Restaurant



Supermarket



Pharmacy



Warehouse



Clothing store



Bookstore

Parameter

Printing method:	Direct thermal			
Printing speed:	230mm/s、260mm/s			
Roll width:	79.5±0.5mm			
Print diameter:	Ф80mm			
Paper thickness:	0.06-0.08mm			
Column capacity:	576dots/line , 512dots/line			
Line's pacing :	3.75mm (Adjustable by commands)			
Print command:	Compatible with the ESC/POS command			
Interface type:	Serial+USB+Lan/36P parallel port/25P serial +USB/LAN			
cutters life:	1million cuts			
Print head life:	100 km			
Input buffer :	2048Kbytes			
NV Flash:	256Kbytes			
Power adaptor:	AC110V/240V、50~60Hz			
Power supply:	DC 24V/2.5A			
Cash drawer supply:	DC 24V/1A			
Work environment:	Temperature(0 ~ 45) humidity(10 ~ 80%) (Non- condense)			
Work environment:	Temperature(0-45) degree centigrade, humidity(10-80%) Non- condense			
Storage environment:	Temperature(-10 ~ 60°C); Humidity(10 ~ 90%)			
Character size:	ANK, FontA:1.5*3.0mm/ FontB: 1.1*2.1mm			
Barcode:	UPC-A/UPC-E/JA (EAN13) /JAN8 (EAN8/CODE39/ITF			
	/CODE93/CODE128 QRCode			
Characters:	PC347 (Standard Europe), Katakana, PC850 (Multilingual),			
	PC860 (Portuguese)、PC863 (Canadian-French)、PC865			
	(Nordic)、West Europe、Greek、Hebrew、East Europe、			
	Iran、WPC1252、PC866 (Cyrillic#2)、PC852 (Latin2)、			
	PC858、IranII、Latvian、Arabic、PT151(1251)			
Physical characteristics:	Weight: 1.25Kg; Appearance size: 190×145×143mm			
	(length * width * height)			



Supported Languages:

Afrikaans	Arabic (Tunisia)	English (British)	French (Switzerland)	Latvian	Spanish (Costa Rica)
Albanian	Arabic (Yemen)	English (Canada)	German (Austria)	Lithuanian	Spanish (Dominican)
Arabic (Algeria)	Basque	English (Caribbean)	German (Liechtenstein)	Macedonian	Spanish (Ecuador)
Arabic (bahrain)	Belarus	English (Irish)	(Luxembourg)	Polish	Spanish (Guatemala)
Arabic (Egypt)	Bulgarian	English (Jamaica)	German (Standard)	Portuguese (Brazil)	Spanish (Mexico)
Arabic (Iran)	Catalan	English (New Zealand)	German (Switzerland)	Portuguese (Portugal)	Spanish (panama)
Arabic (Jordan)	Chinese (Singapore)	English (South Africa)	Greek	Romanian	Spanish (Paraguay)
Arabic (Kuwait)	Chinese (Hongkong)	English (US)	Hebrew	Russian	Spanish (Peru)
Arabic (Lebanon)	Chinese (PRC)	Estonian	Hun	Serbian	Spanish (Uruguay)
Arabic (Libya)	Chinese (Taiwan)	Faroese	Icelandic	Slovak	Spanish (Venezuela)
Arabic (Morocco)	Croatian	Farsi	Indonesian	Slovenian	Thai Language
Arabic (Oman)	Czech	Finnish	Italian (Switzerland)	Swedish	Turkish
Arabic (Qatar)	Danish and Norwegian	French (Belgium)	Italian	Spanish (Argentina)	Ukrainian
Arabic (Saudi Arabia)	Dutch (Belgium)	French (Canada)	Japanese	Spanish (Bolivia)	Urdu
Arabic (Syria)	Dutch (standard)	French (Luxembourg)	Korean	Spanish (Chile)	Vietnamese
Arabic (UAE)	English (Australia)	French (Standard)	Vietnamese	Spanish (Colombia)	


Power plug for option:




How to use?

Connecting the printer:

- The power adapter cable connect to the printer power interface
- The interface cable connect on the printer port behind
- The cash drawer connecting cable connect to the printer's behind the cash drawer interface




Installation of paper roll:



- Open the printer cover.
 - (Install the roller in the roll paper, and put them into the printer.
 - Pull out some paper outside the printer and then close the printer cover.
 - Close the top cover. Press the printer cover to avoid error position of roll paper.
- (Tear-off the paper correctly.)

Setting the Printing Mode(DIP switches):

The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.





Clean of printer:


When the printer has the following conditions should clean the print head:

- The printer does not clear
- The page frame lengthways of printer has some not clean
- Paper feed with a large noise

Printer cleaning steps as follows:

- Shut off the power of printer, Open the Top Cover; If there is paper, please wipe off the paper;
- If it just finished a printing, please wait for a while until the print head cooling;
- With a soft cotton cloth dipped in ethanol (to be wrung) erase the thermal printer head thermal surface dust, stains;
- As the anhydrous ethanol evaporate completely, closed the top cover, and restart to print.

Production Process

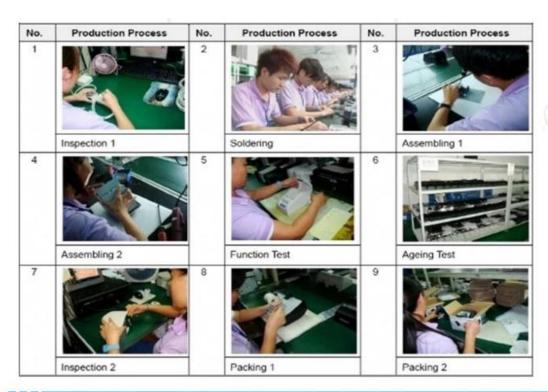

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and

other certifications. We make strictly IQC, IPQC and OQC inspection per

industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

		Indicates information has be	Indicates information has been verified onsite by a certification specialist		
Test Equipr	nent and Facilities				
Verified	Machine Name	Brand & Model No.	Quantity		
1	Ageing Tester	No Information	6		
V	Withstand Voltage Tester	CC2670A	1		
V	Oscilloscope	TBS1102	1		
1	DC Power Supply	PS-305DM	6		
V	Digital Torque Meter	HP100	1		
1	Calliper	GUANGLU	2		
1	Multi-meter	VC890D	7		
1	Test Computer	No Information	13		

Verified by TUV on 2013.7.15

Certification:










Warranty and After Sales:



- Spare parts will be provided for mass orders for customers' local maintenance.
- Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- » Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- > 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:











Payment:









secure payment







Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile





OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers, Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com, Together we quest for the best.













Why you choose us?



Contact us

Any queries, please contact us immediately, big supprise is waiting for you.

Sales Center:

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan

District, Shenzhen 518054, China

Website: www.ocominc.com www.possolution.com.cn; E-mail: ocom@ocominc.com, info@possolution.com.cn;

Tel: +86.755.86053207 ext 800; Fax: +86.755.86053207 ext 868; QQ: 2485890637, 190852203; Wechat: szocominc, hj34924238; Whatsapp: 008613352932860;



D.FAQ:

1. Warranty

OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers'satisfication, our warranty of the products is about 12 months from the shipment normally, some designated models can have as long as 24 months warranty. For mass order, we can supply you some spare parts for local repair. And after that, you can returned failure parts for reworks.

2. Payment Terms

For mass order, you can pay us by using T/T, LC, Western Union, Escrow or others. About samples order, T/T, Western Union, Escrow, Paypal are acceptable. Escrow Service is powered by Alipay.com. Currently, you can pay using Moneybookers, Visa, MasterCard and bank transfer. You can also pay with select debit cards including Maestro, Solo, Carte Bleue, PostePay, CartaSi, 4B and Euro6000.

3. Shipment

We accept all kinds of shipping ways including: express, air, sea, car, or pick up by customers personally.

4. Sample Availability & Policy

After customers confirmed our specification, we are very glad to provide samples for testing and qualification. All samples should be paid before shippment, and the samples price is a little higher than mass order. When the mass order placed, we can return you the samples cost, or send you more products with the shippments. You can buy the samples from us directly using t/t, western uion, or paypal. And you can also buy it o n our online store аt aliexpress: http://www.aliexpress.com/store/403448?tracelog=minisite CI The sample order is needed before we release to our factorie

5. After-sales Service:

* We have the top 1% level trade assurance upto USD12000 guarranteed by alibaba, which can proect your money well to ensure the lead time and products quality. (1) All products warranty is not less than one year, some models even up to two years warranty. (2) Spare parts will be provided for mass orders for customers' local maintenance. (3) Have distributors or authorized agents in main market who can provide local repair and replacement services. (4) Professional CRM management insures fast customer's enquiries and orders tracking. (5) Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility. (6) 7*24 hours online, working days respond within four hours, rest days within 12 hours.

6. Download

You can access http://www.possolution.com.cn/cn/download.html download drivers, SDK software, product specifications and user manuals.

7. Video Guide

To help customers use our products better, we have recorded and upload some video guidance, you can find them at http://www.possolution.com.cn/video.html.

8. MOQ policy

No MOQ limitation for the standard products, but the unit price is different. For customized production, you can discuss the MOQ with our sales rep.

9. Request a quote

Request a quote at http://www.possolution.com.cn/inquiry.html

E.Company:

OCOM is a leading One-stop POS and Auto-ID Related Products Supplier which is qualified by Global Fortune 500 company. We have Top 1 level Trade Assurance guarantee.

OCOM's products portfolio covers Thermal Printer, Barcode Printer, DOT Matrix Printer, Barcode Scanner, Data Collector, POS Machine and other POS Peripherals products, which are widely used for retailing, restaurant, bank, lottery, transportation, logistics, and other applications. We have CE, FCC and other required certifications.

Since established in June 2007, OCOM have been sticking to the quality system of ISO9001: 2008. We focus on reliable products quality and competitive price. We were serving more than 1300 customers over 133 countries, 40 of them are the biggest distributors in their territory. Our main markets are in Europe, Australia, and fast growing South America and Africa. The customer list includes famous Unilever, O2, Equicom...

OCOM's mission is to be the compelling choice for our partners, based on our three basic beliefs "Integrity based, Strive for excellence, Win-win cooperation", we would like establish stable and reliable partnerships with customers all over the world. OEM/ODM is welcome.

Together we quest for the best.

F.Contact:

Contact: Harold Hu

OCOM Technologies Limited

Address: 4/F, Block 10, Zhongxing Industrial Park, Chuangye Road, Nanshan District,

Shenzhen 518054, China;

Website: www.ocominc.com, www.possolution.com.cn;

E-mail: sales14@ocominc.com; Skype:sales14@ocominc.com MSN: ocomsales14@hotmail.com; Whatsapp: 0086.18948789890; Wechat: 0086.18948789890; Mobile: 0086.18948789890;

QQ: 1467261417;

Tel: 0086.755.86053207-814; Fax: 0086.755.86053207-868;