

# OCPP-80T Desktop 3 inch supermarket invoice billing printer 80mm android thermal pos printer with cutter

□ **Model NO.: OCPP-80T** □

## Features:

Supports multi 1D barcode and QR code printing.

Support printer status monitoring function

100M Ethernet port, ultra high speed data transmission.

256KB NV Logo storage and 256kb big buffer memory.

Compatible with OPOS/JPOS driver.

100KM long life printer head

## Technical parameters□

|                       |                                                                                                                                                                                                                                           |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Print Method          | Direct Thermal                                                                                                                                                                                                                            |
| Command               | ESC/POS                                                                                                                                                                                                                                   |
| Resolution            | 576dots/line or 512dots/line                                                                                                                                                                                                              |
| Printing Width        | Max=72mm                                                                                                                                                                                                                                  |
| Paper Type            | Thermal Receipt Paper                                                                                                                                                                                                                     |
| Interface             | USB/UL/U+BT/ U+WIFI                                                                                                                                                                                                                       |
| Print Speed           | 200 mm/s □U□<br>260 mm/s (UL)                                                                                                                                                                                                             |
| Paper Width           | 80mm                                                                                                                                                                                                                                      |
| Paper Thickness       | 0.06~0.08mm                                                                                                                                                                                                                               |
| Roll Dia              | Max. Ø 83 mm                                                                                                                                                                                                                              |
| Paper Cut             | Manual tear and Auto-cutter                                                                                                                                                                                                               |
| Input buffer          | 256kbytes                                                                                                                                                                                                                                 |
| NV Flash              | 256kbytes                                                                                                                                                                                                                                 |
| Font Size             | font A:12*24(standard), font B:9*17                                                                                                                                                                                                       |
| Chinese               | GB18030,BIG5 24x24dots                                                                                                                                                                                                                    |
| Japanese/Korea        | Support                                                                                                                                                                                                                                   |
| User-defined language | PC347(Standard Europe),Katakana,PC850(Multilingual),PC860(Portuguese),PC863(Canadian-French),PC865(Nordic),West Europe,Greek,Hebrew,East Europe,Iran,WPC1252,PC866(Cyrillic#2),PC852(Latin2),PC858,IranII,Latvian,Arabic,PT151(1251) ect. |
| 1D                    | UPC-A/UPC-E/JAN13□EAN13□JAN8□EAN8□/CODE39/ITF/CODABAR/CODE93/CODE128                                                                                                                                                                      |
| 2D                    | QR code ( <b>Single USB or UR solution no QR code function</b> )                                                                                                                                                                          |
| Printing head life    | 100 KM                                                                                                                                                                                                                                    |
| Cutter life           | 1million                                                                                                                                                                                                                                  |
| Paper separator       | Optional                                                                                                                                                                                                                                  |
| Sensors               | Paper out, cover open, cutter jam,paper jam and black mark detection(Optional)                                                                                                                                                            |
| Input                 | AC 100V-240V 50/60HZ                                                                                                                                                                                                                      |
| Output                | DC 24V/2.5A                                                                                                                                                                                                                               |
| Working Condition     | 0°C~45°C, 10%~80%RH                                                                                                                                                                                                                       |
| Storage Condition     | -10°C-60°C,10%~90%RH                                                                                                                                                                                                                      |

|              |                                                                                                   |
|--------------|---------------------------------------------------------------------------------------------------|
| Accessories  | Data cable,power adaptor,power code,paper roller,CD>manual, (standard)<br>Paper separator(option) |
| Dimensions   | 180(D)x142(W)x136(H)mm                                                                            |
| Net weight   | 1.14kg                                                                                            |
| Gross weight | 1.8kg                                                                                             |
| Driver       | Windows XP /Vista/ Win7/Win8 /Win10/Win 2000/Win CE/OPOS/JPOS                                     |
| SDK          | Android, IOS                                                                                      |



# OEM/ODM

FAMOUS PARTNER BRANDS



[Click here](#)


Customized Your LOGO




Customized Your Packaging



Support Customer's Idea To Do The Design

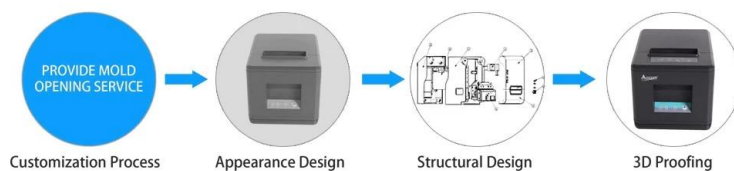

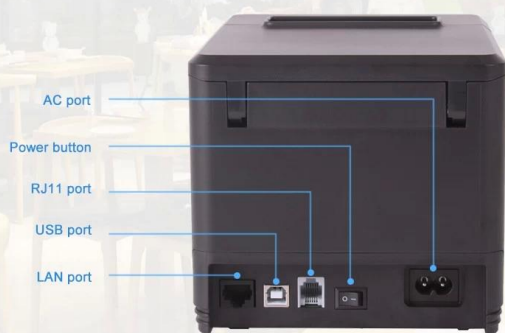

## 80MM Thermal Printer with Auto Cutter

**OCPP-80T**



Windows

LINUX



Android

IOS



## Direct Thermal Printing

Without the printing ink and ribbon etc traditional consumables,  
Low material cost



Thermal Receipt Paper  
Paper Width: 80mm  
Roll Dia: Max. Ø 83mm



## Packaging accessories

SMART PRINTING

Beautiful packaging, original accessories



- 01 Machine   02 Thermal Paper   03 Paper Roller
- 04 Power Cable   05 USB Cable   06 User Manual

## Easy Paper Loading

One button operation, abandon the traditional paper loading structure, and directly put the paper in, easy to operate





# APPLICATION

