

# Handheld Android POS Terminal with Thermal Label and Receipt Printer

(M/N: POS-T2 Pro)

## Features:



Octa-core, SC9863, Cortex-A55, 1.6GHz processor;

Built-in high speed 58mm thermal receipt and label printer;

Standard 3GB RAM+16G ROM;

Built-in large volume speaker;

Built-in NFC Module;

2\*SIM card slot;

Support USB type-C fast charging;

Removable 6400mAh large capacity pure cobalt battery;

1D&2D Bar code reader and fingerprint for option;

Android 12 or Android13 supported.

## Technical Spec:

|                   |  |
|-------------------|--|
| Model             | POS-T2Pro  |
| Name              | 5.99-inch capacitive touch screen, support the electronic signature                                  |
| Battery           | 3.8 V /6400mAh   |
| Power Adapter     | Input: 100-240V, 50/60Hz, 1.5A, Output: 5V DC /2A  |
| Charger interface | USB type C   |
| Display           |  |
| Main screen       | 5.99 inch HD touch screen display  |
| Resolution        | 720*1440 IPS   |
| Performance       |  |
| CPU               | Octa-core, SC9863, Cortex-A55, 1.6GHz processor  |
| RAM               | 3GB  |
| Flash             | 16GB Flash   |
| Communication     | 2G/3G/4G   |
| Operating System  | Android 12 or Android 13   |
| Button            | Power button, Scan Button, Volume button   |
| Bluetooth         | Bluetooth 4.2  |
| WIFI              | WIFI 802.11 b.g.n, Support 2.4G  |
| Printer           | 58mm Thermal Receipt and label Printer   |
| Paper Roll        | Width: 58mm; Diameter: ≤40mm   |
| Scanner           | 5 Mega-pixel Camera decoding, 2D Scanner (Optional, 2D and finger printer only one can be installed) |
| NFC               | Support ISO/IEC 14443A&B, Mifare, Felica card  |
| SIM slot          | Sim*2 (default) or Sim*1+Sam*1 for option  |
| Speaker           | Digital Audio speaker  |
| Fingerprint       | FBI/STQC Fingerprint (Optional, 2D and finger printer only one can be installed)                     |

|                        |                              |
|------------------------|------------------------------|
| GPS or AGPS            | Support GPS+AGPS             |
| MDM                    | Support                      |
| Peripheral Accessories |                              |
| Accessories            | USB Type C*1                 |
|                        | Charging adapter*1           |
|                        | User manual*1                |
| Environment            |                              |
| Operating temperature  | 0 to 40 degrees centigrade   |
| Storage temperature    | -10 to 60 degrees centigrade |
| Working humidity       | 10%~80%                      |
| Storage humidity       | 10%~90%                      |







82mm




57.5mm



197mm





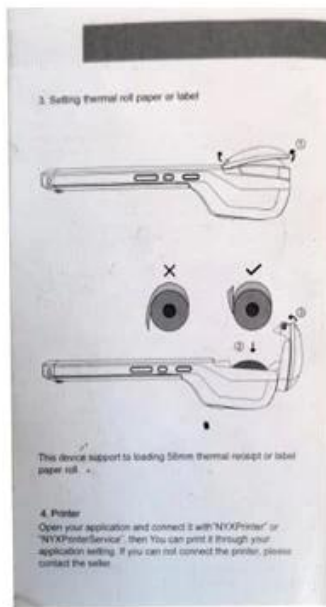

Relevant documents:

[POS-T2 SDK](#)