

andróidePDA industrial com base

(Modelo No.:OCBS-D8000)

Característica:

Android5.1 sistema de operação;

2G RAM, 16G ROM, cartão do TF pode até To32 GB;

ARM Cortex-A53 64bit Quad-Core 1.3GHz;

Suporte 4G LTE e 3G WCDMA;

GPS, de posicionamento por satélite A-GPS;

Hd 8 milhões de pixels, com LED, foco automático;

cartão SIM, cartão PSAM, SD (TF) Cartão Micro Expandir Porto;

Recarregável Li-Polymer Battery 3.7V 4000mAh Opção;

Cor da tela durável toque 4,0 polegadas QVGA de vidro imitativa;

Ambiente selado: IP65;

6 lados pode suportar o impacto da queda de 1,5 m de chão de cimento.

Especificação:

parâmetro físico	
Tamanho	152 milímetros (L) x 77 milímetros (H) x 29 milímetros (W)
Peso	<500g
Tela de exibição	tela durável tátil a cores 4,0 polegadas QVGA de imitação de vidro TFT-LCD, 650000 cores, 480 * 800 (tamanho QVGA) O brilho da luz de fundo LED é ajustável
Expandir Porto	cartão SIM, cartão PSAM, Micro SD (TF)
interface de comunicação	Dispositivo USB 2.0, RS-232 (opcional)
Modo de entrada	Padrão Stylus, Manuscrito, tocando de entrada de entrada ou teclado
Capacidade de carga	Recarregável Li-Polymer Battery 3.7V 4000mAh opcional
Frequência	falante 8Ω1W
Chave	29pcs tecla de silício
parâmetro de desempenho	
CPU	ARM Cortex-A53 64bit Quad-Core, 1.3GHz
RAM	2G RAM
Flash ROM	16G NAND de memória flash padrão Micro SD / porto TF (Max até 32G)
Comunicação de dados	
WI-FI	Apoio IEEE802.11b / g protocolo, precisa de sinal eficaz LAN sem fios cobrir

FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA / GSM	WCDMA: Uplink: 1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink: 880MHZ-915MHZ; Downlink: 925MHZ-960MHZ GSM: 850MHz, Uplink: 824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHz, Uplink: 880MHZ-915MHZ; Downlink: 925MHZ-960MHZ 1800MHz, Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHz, Uplink: 1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Suporte Bluetooth 2.0 + EDR, distância de transmissão é 5-10m
Ambiente operacional	
Temperatura de operação	-20 °C a 50 °C
Temperatura de armazenamento	-25 °C a 70 °C
ambiente Umidade	5% RH - 95% RH (sem condensação)
Especificações de queda	6 lados pode suportar o impacto da queda de 1,5 m de chão de cimento no intervalo de temperatura operacional
rolo Especificações	1000 vezes / 0.5m, rolo na área de contato 6 lados
ambiente selado	IP65
Ambiente de desenvolvimento	
Sistema operacional	Android5.1
SDK	kit de desenvolvimento de software de uso exclusivo
Língua suportada	JAVA
Ferramenta de desenvolvimento	Eclipse
Um código de barras unidimensional coletar	
Um scanners CCD dimensionais	Symbol SE655
Resolução	largura mínima 5mil
Luz ambiente	0ft.candles-10000ft.candles
velocidade de digitalização	50 / seg
Ângulo da exploração	53° ± 3°
Tipo de suporte de código de barras	UPC / EAN, Bookland EAN, Código 128, Code39, Code 93, Code 11, Interleaved 2 de 5, Discrete 2 de 5, chinês 2 de 5, Matrix 2 de 5, Inverse 1D, MSI, GS1 DataBar, etc.
Um scanner a laser dimensional	Mingde966 Padrão, Símbolo 955, HoneywellN4313 (para opcional)
Resolução	largura mínima 4mil
Luz ambiente	10000ft.candles (107640 lux)
velocidade de digitalização	104 (±) 12 / seg (bothway)
Ângulo da exploração	47° ± 35° (Standard) / 35° ± 3° (ângulo estreito)
Tipo de suporte de código de barras	UPC / EAN, Code128, Code39, Code93, code11, Intercalado 2 de 5, Discrete 2 de 5, chinês 2 de 5, Codabar, MSI, RSS
código de barras bidimensional aquisição	
CMOS Scanner	Newland 3096 Padrão, HONEYWELL N3680 para opcional
A Resolução do sensor	752 (nível) × 480 (vertical) pels (nível de cinza)
Luz ambiente	Todos os 9000ft.candles escuras / 96900 Luxo
elemento Focus (VLD)	655nm ± 10nm
Suporte tipo de código de barras	PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, código QR, Micro código QR, Aztec, MaxiCode; Códigos postais: US PostNet, US planeta, Reino Unido postais, Australian Postal, JapanPostal Dutch Postal (KIX) 3
RFID	
LF	125K; ISO11784 / ISO11785 protocolo

HF	13,56; ISO14443A / B protocolo
Câmera	Hd 8 milhões de pixels, com LED, focagem automática
GPS	Apoio ao A-GPS



Android Based Industrial PDA

OCBS-D8000




Product Picture



Features

Reliable with good price

Android 5.1 Operating System;
Color 4.0 inch QVGA imitative glass durable touch screen;

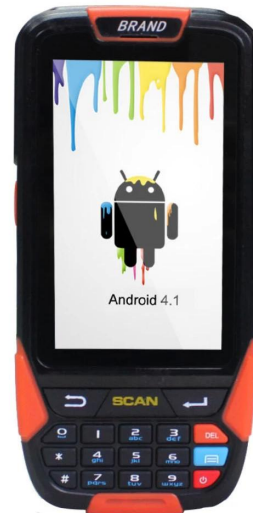

Support 1D or 2D barcode scanning
Support wifi and bluetooth

FDD-LTE.WCDMA,GSM Support
A-GPS satellite positioning optipn
ARM Cortex-A53 64bit?Quad-Core 1.3GHZ





Hd 8million pixels,with LED,
automatic focusing;
RFID Reader and writer optional

PSAM Card SIM Card, Micro SD(TF)Card Expand Port
3.7V 4000mAh Rechargeable Li-Polymer
Battery.



Sealed Environment:IP65;
6 side can bear impact from
1.5m drop to cement floor.



Application place



Bookstore



Supermarket



Pharmacy



Warehouse



Logistics



Restaurant

Parameter

Physical Parameter	
Size	152mm(L)×77mm(H)×29mm(W)
Weight	<500g
Display Screen	Color 4.0 inch QVGA imitative glass durable touch screen TFT-LCD, 650000 colors, 480*800 (QVGA size) The brightness of LED Backlight is adjustable
Expand Port	SIM card, , Micro SD (TF) Card
Communication Interface	USB2.0 Device,
Input Mode	Standard Stylus, Handwriting, touching input or keyboard input
Battery Capacity	Rechargeable Li-polymer Battery 3.7V 4000mAh Optional
Performance Parameter	
CPU	ARM Cortex-A53 64bit Quad-Core 1.3G
RAM	2G RAM
Flash ROM	Standard 16G NAND Flash Storage Micro SD/TF port (Max up to 32G)
Data Communication	
WI-FI	Support IEEE802.11b/g/n protocol, it need effective wireless LAN signal cover
FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA /GSM	WCDMA: Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ GSM: 850MHZ, Uplink:824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHZ, Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ 1800MHZ,Uplink:1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHZ ,Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Support Bluetooth 2.0+EDR/3.0+HS/4.1+HS, transmission distance is 5-10m
Operating Environment	
Operating Temperature	—20C to 50C
Storage	—25C to 70C

Production Capacity:

✓ Indicates information has been verified onsite by a certification specialist

Production Capacity

Verified	Product Name	Production Line Capacity	Actual Units Produced(Previous Year)
✓	Thermal Printer	40,000 Sets / Month	250,000 Sets
✓	Dot Matrix Printer	15,000 Sets / Month	10,000 Sets
✓	Bluetooth Printer	30,000 Sets / Month	20,000 Sets
✓	Barcode Scanner	40,000 Sets / Month	20,000 Sets
✓	POS Machine	5,000 Sets / Month	10,000 Sets
✓	Magnetic Card Reader and Writer	45,000 Sets / Month	50,000 Sets

Verified by TUV on 2013.7.15

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:




Warranty and After Sales:



- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:

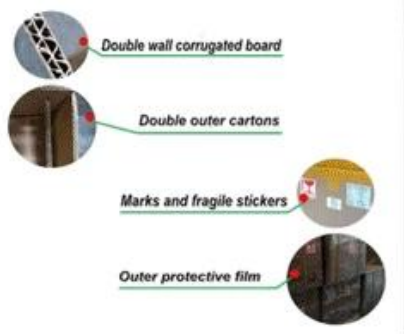

Payment:



secure payment



AliExpress

PayPal

Trade Assurance

Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile

||

TRADE ASSURANCE \$

- 100% money refund for Late shipment & Quality problem
- Guarantee on-time delivery
- Third-party pre-shipment quality inspection (Optional)
- No transaction commission charged
- The HIGHEST assurance amount guaranteed by alibaba in the Auto-ID and POS industry .



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers , Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com, Together we quest for the best.



Why you choose us?



Contact us

Any queries, please contact us immediately, big surprise is waiting for you.

Sales Center:

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Website: www.ocominc.com www.possolution.com.cn;

E-mail: ocom@ocominc.com, info@possolution.com.cn ;

Tel: +86.755.86053207 ext 800;

Fax: +86.755.86053207 ext 868;

QQ: 2485890637, 190852203;

Wechat: szocominc, hj34924238;

Whatsapp: 008613352932860;



Documentos relevantes:

*[CD OCBs-D8000](#)

