

Impressora térmica de alta velocidade 80 mm, impressora POS 80 (Modelo: OCPP -88A)

Características:

- 1 Aparência única com molde confiável;
- 2 Alta velocidade de impressão até 300 mm / segundo;
- 3 Opcional aUto Cutter;
- 4 Comunicação por cabo e sem fio para opções
- 5 Múltiplas interfaces disponíveis: USB, USB + Series-+ LAN; e Wi-Fi + USBBluetooth + USB
- 6 Alarme de som e luz suportado para uso na cozinha;
- 7 Suporte para impressão de múltiplos tipos de códigos 1D e QR;
- 8 Suporte para vários idiomas internacionais;
- 9 SDK para Android e IOS acessível;
- 10 Cabeça de impressora confiável com vida útil de 100 km;
- 11 Compatível com os comandos EPSON ESC / POS.

parâmetros:

| | |
|-----------------------------|---|
| Método de impressão | Impressões de linha térmica |
| Personagem de impressão | 576dots / line (padrão), 512dots / line; Personagens : Chinês simplificado 24x24 ponto, suporte 18030 biblioteca de fontes, suporte para Taiwan tradicional e HK (fonte complexa), Caracteres ANK; |
| Fonte | A: 12 * 24 pontos, 1,5 (W) * 3,0 (H) mm; B: 9 * 17 pontos, 1,1 (W) * 2,1 (A) mm Simplificado / tradicional: 24 * 24 pontos, 3,0 (B) * 3,0 (A) mm |
| Tipo de código de barras | JUPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODABAR / ITF / CÓDIGO39 / CODE93 / CODE128, código QR |
| Velocidade de impressão | 250 mm / seg uma e dois interface, 300 mm / seg.r três interfaces |
| Interface | USB,USB + Series-+ LAN, Wi-Fi + USBBluetooth + USB |
| Trabalho de impressão | Compatível com EPSON ESC / POS comandos |
| motoristas | Win9X / Windows XP / Win2000 / Win2003 / Win Vista / Win 7 / Win 8 / Win8.1 / Linux, compatível com ESPONSDK para Android e IOS acessível. |
| Largura do papel | 79,5 ± 0,5 mm (largura de impressão 72 mm) |
| Diâmetro do papel | 83 mm |
| Espessura do papel | 0,06-0,08 mm |
| Cortador | UMAcortador de uto (Opcional) |
| Confiabilidade de impressão | 100km |

| | | |
|----------------------|--------------------------|--|
| poder | DC24V / 2.5A | |
| Temperatura | 0-45 graus C | |
| Umidade de Contraste | 10 a 80% | |
| Dimensão externa | 190 *145*145(Milímetros) | |
| Peso | 1,60 kg | |
| Peding em formação | P / N | Ddescrição |
| | OCPP-88A-U | USB portacom cortador de carros |
| | OCPP -88A-url | VOCÊSB + + Serial Lan portacom cortador de carros |
| | OCPP -88A-W | Wifi + USB portacom cortador de carros |
| | OCPP -88A-BU | Bluetooth + USB, com cortador de carro |
| | OCPP -88A-VOCÊ0 | USB portasem cortador de carro |
| | OCPP -88A-url0 | VOCÊSB + + Serial Lan portasem cortador de carro |
| | OCPP -88A-W0 | Wifi + USB portacoma partir de cortador automático |
| | OCPP -88A-BU0 | Bluetooth + USB, sem cortador automático |



Unique 80mm High Speed
POS Thermal Printer
OCPP-88A



Product Picture



Features:

Reliable with good price

Unique appearance with reliable mould



**High Printing Speed up to 300mm/second;
Auto Cutter Optional ;
Cord and cordless communication for options**

**Reliable printer head with 100km life;
Compatible with EPSON ESC/POS
commands.**



**Sound and light alarm supported
suitable for kitchen application;**



**Support multi international languages;
SDK for Android available;**



**Multiple interfaces available:
USB, USB+Serial, USB+ LAN,
USB+ Serial+ LAN; and Wifi+USB,
Bluetooth+USB+LAN**



| | | | | | |
|-----------------------|----------------------|------------------------|------------------------|-----------------------|----------------------|
| Afrikaans | Arabic (Tunisia) | English (British) | French (Switzerland) | Latvian | Spanish (Costa Rica) |
| Albanian | Arabic (Yemen) | English (Canada) | German (Austria) | Lithuanian | Spanish (Dominican) |
| Arabic (Algeria) | Basque | English (Caribbean) | German (Liechtenstein) | Macedonian | Spanish (Ecuador) |
| Arabic (bahrain) | Belarus | English (Irish) | German (Luxembourg) | Polish | Spanish (Guatemala) |
| Arabic (Egypt) | Bulgarian | English (Jamaica) | German (Standard) | Portuguese (Brazil) | Spanish (Mexico) |
| Arabic (Iran) | Catalan | English (New Zealand) | German (Switzerland) | Portuguese (Portugal) | Spanish (panama) |
| Arabic (Jordan) | Chinese (Singapore) | English (South Africa) | Greek | Romanian | Spanish (Paraguay) |
| Arabic (Kuwait) | Chinese (Hongkong) | English (US) | Hebrew | Russian | Spanish (Peru) |
| Arabic (Lebanon) | Chinese (PRC) | Estonian | Hun | Serbian | Spanish (Uruguay) |
| Arabic (Libya) | Chinese (Taiwan) | Faroese | Icelandic | Slovak | Spanish (Venezuela) |
| Arabic (Morocco) | Croatian | Farsi | Indonesian | Slovenian | Thai Language |
| Arabic (Oman) | Czech | Finnish | Italian (Switzerland) | Swedish | Turkish |
| Arabic (Qatar) | Danish and Norwegian | French (Belgium) | Italian | Spanish (Argentina) | Ukrainian |
| Arabic (Saudi Arabia) | Dutch (Belgium) | French (Canada) | Japanese | Spanish (Bolivia) | Urdu |
| Arabic (Syria) | Dutch (standard) | French (Luxembourg) | Korean | Spanish (Chile) | Vietnamese |
| Arabic (UAE) | English (Australia) | French (Standard) | Vietnamese | Spanish (Colombia) | |


Power plug for option:




How to use?

Connecting the printer:

- ▶ The power adapter cable connect to the printer power interface
- ▶ The interface cable connect on the printer port behind
- ▶ The cash drawer connecting cable connect to the printer's behind the cash drawer interface

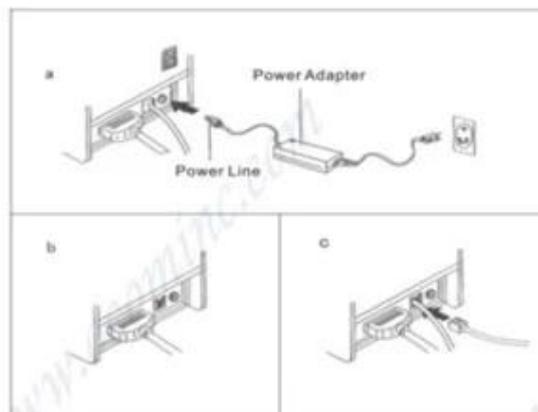


Installation of paper roll:

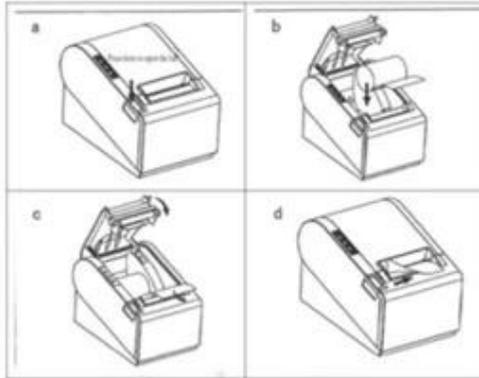

- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.
- E Tear-off the paper correctly.

Setting the Printing Mode(DIP switches):

The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.

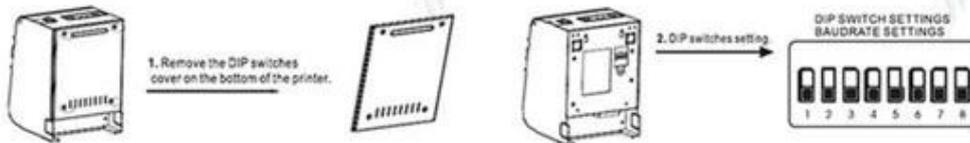

Power indicator:
Turn on/off the printer

Alarm indicator:
When the printer is out of paper, the cutter error occurs or printer head overheats, the ALARM indicator flashes.

Paper indicator:
Both of paper indicator and error indicator are on, means paper end-user, both of paper indicator and error indicator are off, means have paper.

FEED button:
Press to feed paper manually.

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

| Verified | Machine Name | Brand & Model No. | Quantity |
|----------|--------------------------|-------------------|----------|
| ✓ | Ageing Tester | No Information | 6 |
| ✓ | Withstand Voltage Tester | CC2670A | 1 |
| ✓ | Oscilloscope | TBS1102 | 1 |
| ✓ | DC Power Supply | PS-305DM | 6 |
| ✓ | Digital Torque Meter | HP100 | 1 |
| ✓ | Calliper | GUANGLU | 2 |
| ✓ | Multi-meter | VC890D | 7 |
| ✓ | Test Computer | No Information | 13 |

Verified by TUV on 2013.7.15

Certification:



Warranty and After Sales:



- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:



Payment:



secure payment



AliExpress

PayPal

Trade Assurance

Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Contato& ENSP; NOS

Endereço: 4 / F, bloco 10, parque industrial de Zhongxing, estrada de Chuangye, distrito de Nanshan, Shenzhen 518054, China;

Local na rede Internet: www.ocominc.com, www.pos.solution.com.cn;

O email: sales07@ocominc.com, sales07@ocomtech.com .cn;

Gerente de comércio: cn1000542707;

Skype: ao vivo: ocom sales07;

MSN: ocomsales07@hotmail.com;

QQ: 3152989359;

Mobile / Wechat / Whatsapp: 0086189.48778596;

Tel: 0086.755.86053207-807;

Maquina de fax: 0086.755.86053207-868;



Phoebe Hong



OCOM Technologies Limited

Add: 4/F, Block10, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Tel: 0086.755.8605.3207 ext 807

Fax: 0086.755.8605.3207 ext 868

Web: www.ocominc.com

E-mail: sales07@ocominc.com, sales07@ocomtech.com.cn

Skype: [ocomsales07](https://www.skype.com/people/ocomsales07); **MSN:** ocomsales07@hotmail.com

Ali TM: cn1000542707; **QQ:** 3152989359

Mobile/Wechat/Whatsapp: 0086.18948778596



Reliable One-Stop Supplier for POS and Auto-ID Related Products