


## Driver Installation Guide

1. Run   to install driver  
See below:





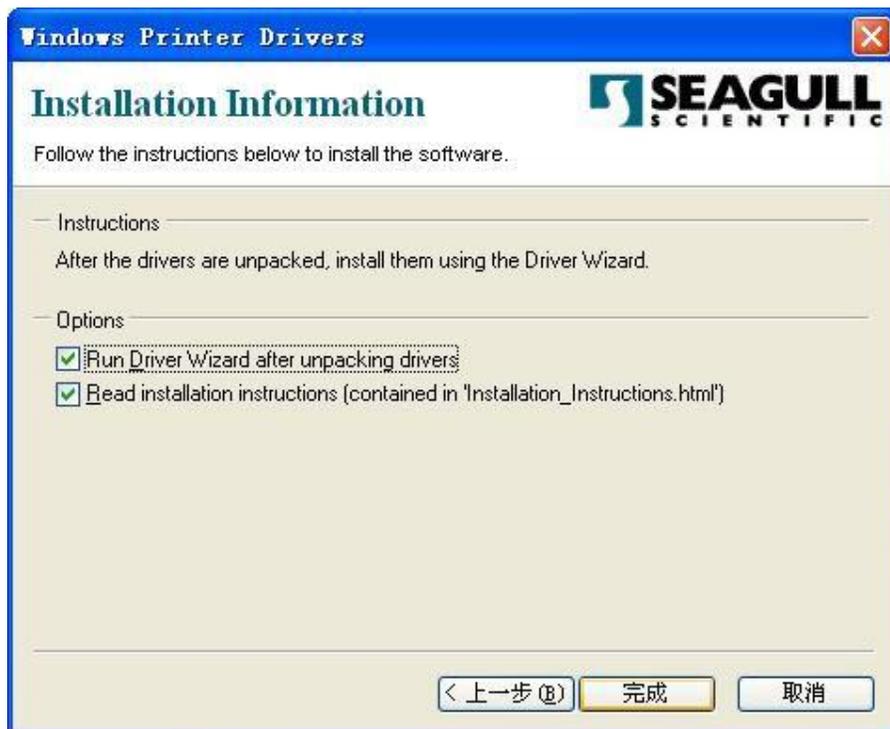

Select printer model TSC TDP-245



Select communication port. For example, if your printer is serial port (COM port), you need to do "port configuration". The default parameter is as following.








2 .details explanation for TSC TDP-245 driver

**Please select correct communication port:**


Right click printer icon, select “ properties”




Select Correct printer communication port. E.g. “parallel” select “LTP1”, “serial” select “COM1”, “USB” select “USB001”. “Ethernet” select “add port”. Refer to below:

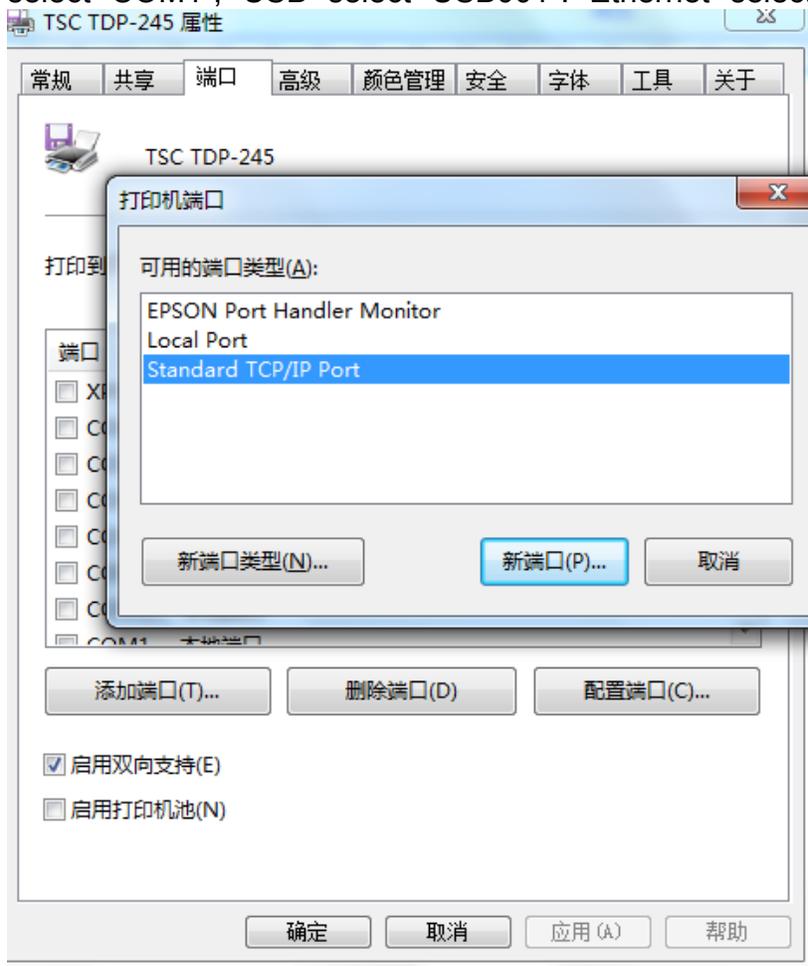


The click “ New port”, see below

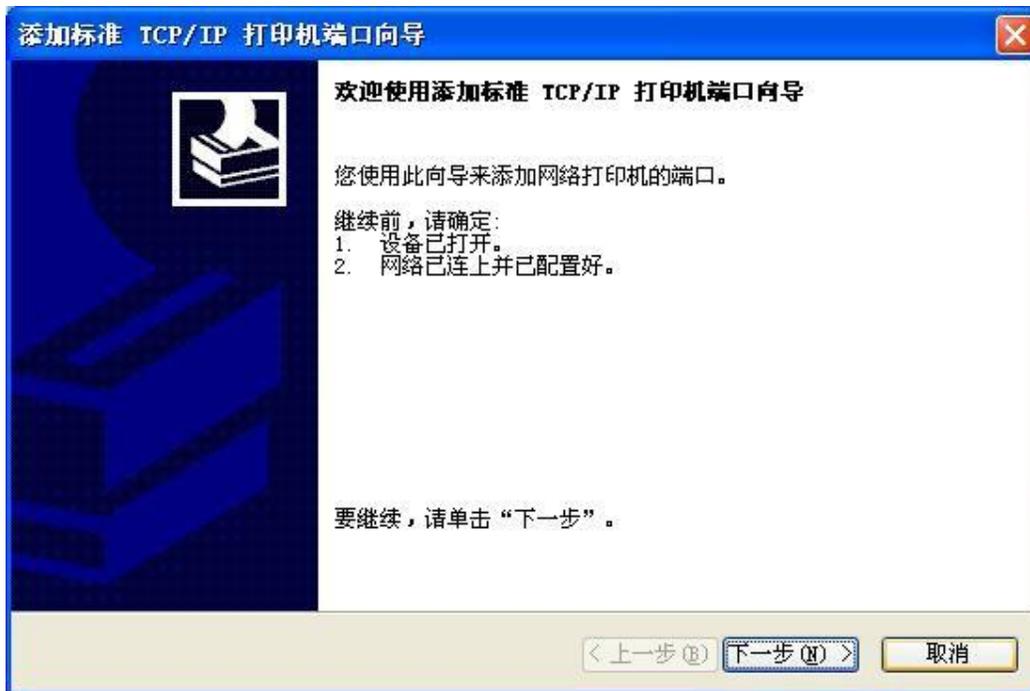

Click next step, see below:

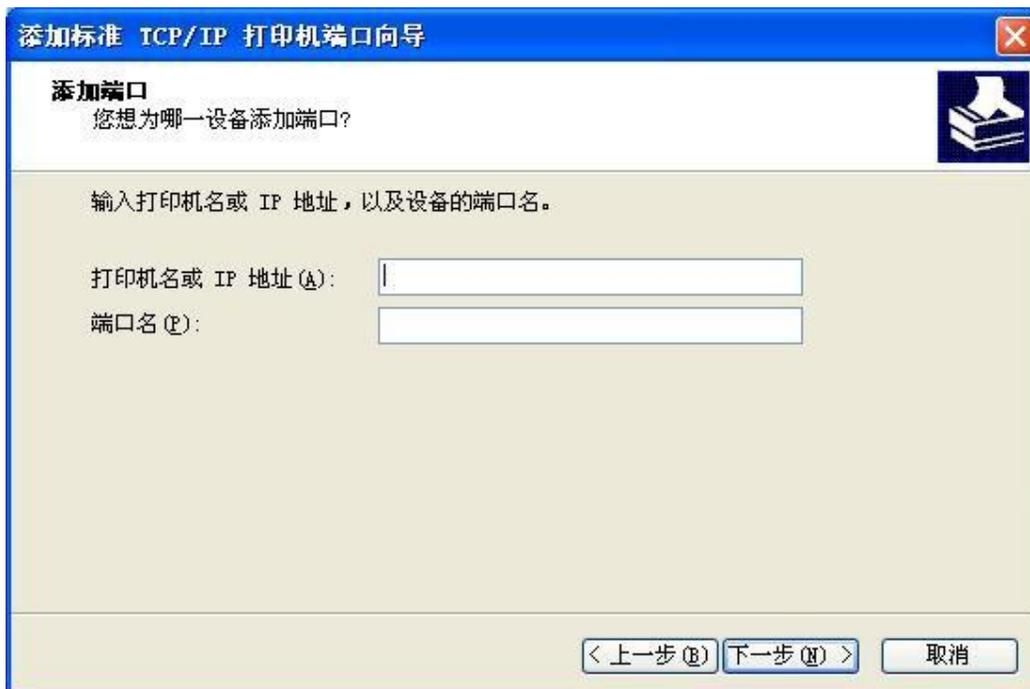

Input printer "IP address", see below:

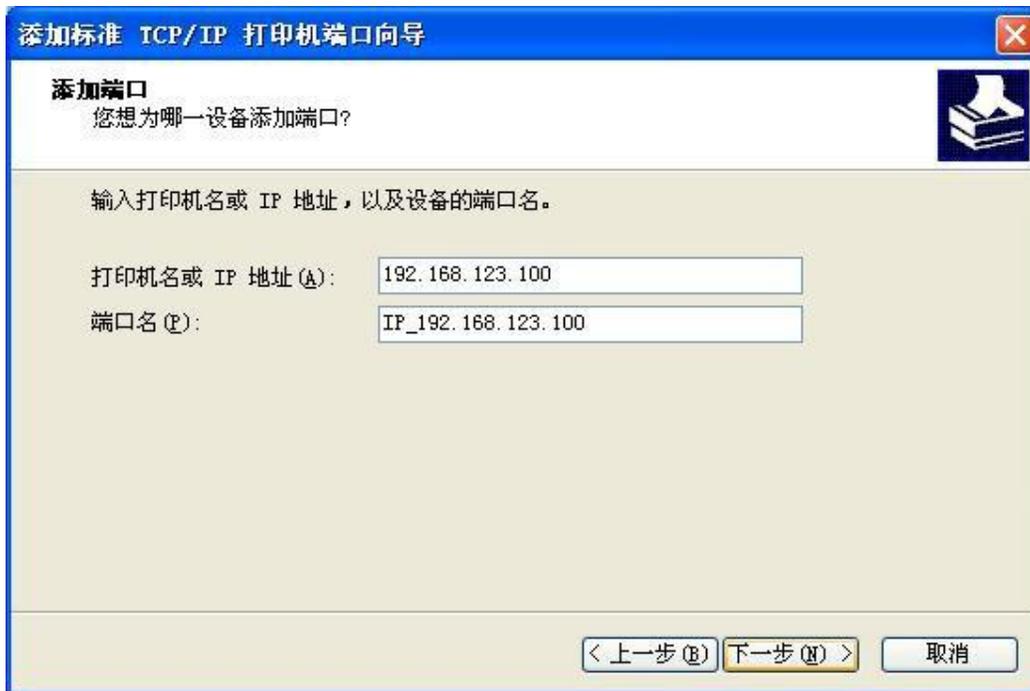

Click “next step”, see below:



Click “configuration”, see below.



Click “confirm” and then “next step”, see below:



Click “finish” and finished add LAN port communication. Then select “IP-192.168.123.100”. see below:

