

AndroidНа основе Промышленный КПК

(Модель No.:OCBS-D8000)

Особенность:

Android5.1 работы системы;

2G RAM, ROM 16G, карточка TF может до to32 GB;

ARM Cortex-A53 64-битной Quad-Core 1,3 ГГц;

Поддержка 4G LTE и 3G WCDMA;

GPS, A-GPS спутникового позиционирования;

Nd 8 миллионов пикселей, со светодиодом, автоматическая фокусировка;

SIM-карты, PSAM карты, SD (TF) Card Micro Expand порт;

Литий-полимерный аккумулятор 3.7V 4000mAh Опция;

Цвет 4,0-дюймовый QVGA подражательной стекла прочный сенсорный экран;

Герметичный окружающей среды: IP65;

6 стороны могут принести удар от падения 1,5 м на бетонный пол.

Спецификация:

Физический параметр	
Размер	152мм (L) × 77mm (H) × 29mm (W)
вес	<500g
Экран монитора	Цвет 4,0-дюймовый QVGA подражательной стекла прочный сенсорный экран TFT-LCD, 650000 цветов, 480 * 800 (размер QVGA) Яркость светодиодной подсветкой регулируется
Расширение порта	SIM-карты, PSAM карты, Micro SD (TF)
интерфейс связи	USB2.0 Устройство, RS-232 (опционально)
Режим ввода	Стандартный стилус, рукописный ввод, прикасаясь ввод или ввод с клавиатуры
Емкость батареи	Литий-полимерный аккумулятор 3.7V 4000mAh Дополнительный
частота	8Ω1W динамик
ключ	29pcs ключ мягкого кремния
Производительность Параметр	
ЦПУ	ARM Cortex-A53 64bit Quad-Core, 1,3 ГГц
ОЗУ	2G RAM
Flash ROM	Стандартный 16G NAND Flash Storage Micro SD / TF порт (макс до 32G)
Передача данных	
ВАЙ-ФАЙ	Поддержка IEEE802.11b / г протокол, он нужен эффективный сигнал беспроводной локальной сети обложка

FDD-LTE	Хакеры: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Хакеры: 1710-1785 МГц; Downlink: от 1805 МГц-1880 МГц Хакеры: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA / GSM	WCDMA: Хакеры: 1850 МГц-1910MHZ; Downlink: 1990MHZ-1930 МГц Хакеры: 880MHZ-915MHz; Downlink: 925MHZ-960MHz GSM: 850MHZ, Uplink: 824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHz, Uplink: 880MHZ-915MHz; Downlink: 925MHZ-960MHz 1800MHZ, Uplink: 1710-1785 МГц; Downlink: от 1805 МГц-1880 МГц 1900MHZ, восходящей линии: 1850 МГц-1910MHZ; Downlink: 1990MHZ-1930 МГц
блютуз	Поддержка Bluetooth 2.0 + EDR, дальность передачи составляет 5-10m
Рабочая среда	
Рабочая Температура	-20 °C до 50 °C
Температура хранения	-25 °C до 70 °C
Влажность окружающей среды	5% RH - 95% RH (без конденсации)
Капля Технические характеристики	6 стороны могут принести удар от падения 1,5 м на бетонный пол в диапазоне рабочей температуры
ролл Технические характеристики	1000 раз / 0.5м, катится на 6 сторон площади контакта
Герметичный окружающей среды	IP65
Среда разработки	
Операционная система	Android5.1
SDK	комплект для разработки программного обеспечения специальный
Поддерживаемые языки	ЯВА
Инструмент развития	Затмение
Одномерный штрих-код собирать	
Одномерные CCD сканеры разрешение	Символ SE655 5mil минимальная ширина
Окружающий свет	0ft.candles-10000ft.candles
Скорость сканирования	50 / сек
Сканирование Угол	53° ± 3°
Тип поддержки штрих-кода	UPC / EAN, Bookland EAN, Code 128, Code39, Code 93, Code 11, Interleaved 2 из 5, Discrete 2 из 5, китайский 2 of5, Матрица 2 из 5, Inverse 1D, MSI, Gs1 DataBar и т.д.
Одномерная лазерный сканер разрешение	Mingde966 Standard, Symbol 955, HoneywellN4313 (для опционного) 4mil минимальная ширина
Окружающий свет	10000ft.candles (107640 люкс)
Скорость сканирования	104 (±) 12 / сек (bothway)
Сканирование Угол	47° ± 35° (Стандарт) / 35° ± 3° (узкий угол)
Тип поддержки штрих-кода	UPC / EAN, Code128, Code39, Code93, Code11, Interleaved 2 из 5, Discrete 2 из 5, Китайский 2 из 5, Codabar, MSI, RSS
Двумерный штрих-код получение	
CMOS сканер	Ньюленд 3096 Standard, HONEYWELL N3680 для опционного
Разрешение сенсора	752 (уровень) × 480 (по вертикали) пелов (уровень серого)
Окружающий свет	Все темные 9000ft.candles / 96900 люкс
Фокус элемент (VLD)	655nm ± 10nm

Поддержка типа штрих-кода	PDF417, MicroPDF417, композитный, RSS, TLC-39, Datamatrix, QR-код, Micro QR-код, Aztec, MaxiCode; Почтовые индексы: США Postnet, США Planet, Великобритания почтовых отделений, Австралийский Почтовая, JapanPostal Голландский Почтовая (KIX) 3
RFID	
LF	125K; ISO11784 / протокол ISO11785
ВЧ	13,56; ISO14443A / В протокол
камера	Нд 8 миллионов пикселей, со светодиодом, автоматическая фокусировка
GPS	Поддержка A-GPS



Android Based Industrial PDA

OCBS-D8000




Product Picture



Features

Reliable with good price

**Android 5.1 Operating System;
Color 4.0 inch QVGA imitative glass
durable touch screen;**

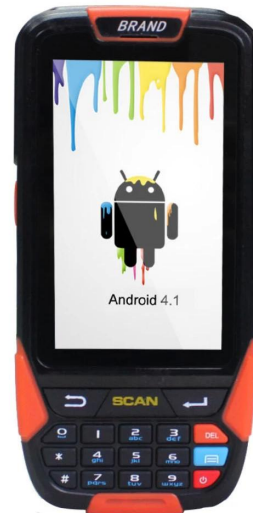

**Support 1D or 2D barcode scanning
Support wifi and bluetooth**

**FDD-LTE.WCDMA,GSM Support
A-GPS satellite positioning optipn
ARM Cortex-A53 64bit?Quad-Core 1.3GHZ**





Hd 8million pixels,with LED,
automatic focusing;
RFID Reader and writer optional

PSAM Card SIM Card, Micro SD(TF)Card Expand Port
3.7V 4000mAh Rechargeable Li-Polymer
Battery.



Sealed Environment:IP65;
6 side can bear impact from
1.5m drop to cement floor.



Application place



Bookstore



Supermarket



Pharmacy



Warehouse



Logistics



Restaurant

Parameter

Physical Parameter	
Size	152mm(L)×77mm(H)×29mm(W)
Weight	<500g
Display Screen	Color 4.0 inch QVGA imitative glass durable touch screen TFT-LCD, 650000 colors, 480*800 (QVGA size) The brightness of LED Backlight is adjustable
Expand Port	SIM card, , Micro SD (TF) Card
Communication Interface	USB2.0 Device,
Input Mode	Standard Stylus, Handwriting, touching input or keyboard input
Battery Capacity	Rechargeable Li-polymer Battery 3.7V 4000mAh Optional
Performance Parameter	
CPU	ARM Cortex-A53 64bit Quad-Core 1.3G
RAM	2G RAM
Flash ROM	Standard 16G NAND Flash Storage Micro SD/TF port (Max up to 32G)
Data Communication	
WI-FI	Support IEEE802.11b/g/n protocol, it need effective wireless LAN signal cover
FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA /GSM	WCDMA: Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ GSM: 850MHZ, Uplink:824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHZ, Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ 1800MHZ,Uplink:1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHZ ,Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Support Bluetooth 2.0+EDR/3.0+HS/4.1+HS, transmission distance is 5-10m
Operating Environment	
Operating Temperature	-20C to 50C
Storage	-25C to 70C

Production Capacity:

✓ Indicates information has been verified onsite by a certification specialist

Production Capacity

Verified	Product Name	Production Line Capacity	Actual Units Produced(Previous Year)
✓	Thermal Printer	40,000 Sets / Month	250,000 Sets
✓	Dot Matrix Printer	15,000 Sets / Month	10,000 Sets
✓	Bluetooth Printer	30,000 Sets / Month	20,000 Sets
✓	Barcode Scanner	40,000 Sets / Month	20,000 Sets
✓	POS Machine	5,000 Sets / Month	10,000 Sets
✓	Magnetic Card Reader and Writer	45,000 Sets / Month	50,000 Sets

Verified by TUV on 2013.7.15

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:




Warranty and After Sales:



- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:

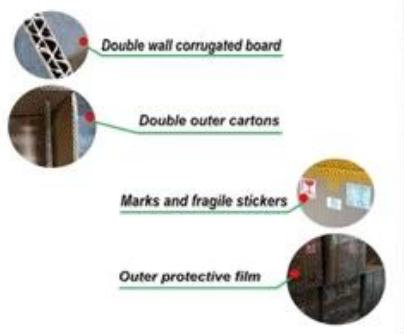

Payment:



secure payment



AliExpress

PayPal

Trade Assurance

Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile



TRADE ASSURANCE

- 100% money refund for Late shipment & Quality problem
- Guarantee on-time delivery
- Third-party pre-shipment quality inspection (Optional)
- No transaction commission charged
- The HIGHEST assurance amount guaranteed by alibaba in the Auto-ID and POS industry .



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers , Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com,

Together we quest for the best.



Why you choose us?



Contact us

Any queries, please contact us immediately, big surprise is waiting for you.

Sales Center:

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Website: www.ocominc.com www.possolution.com.cn;

E-mail: ocom@ocominc.com, info@possolution.com.cn ;

Tel: +86.755.86053207 ext 800;

Fax: +86.755.86053207 ext 868;

QQ: 2485890637, 190852203;

Wechat: szocominc, hj34924238;

Whatsapp: 008613352932860;



Соответствующие документы:

*[OCBs-D8000 CD](#)

