


# bluetooth scanner

OCBS-B250

## Quick Start Guide

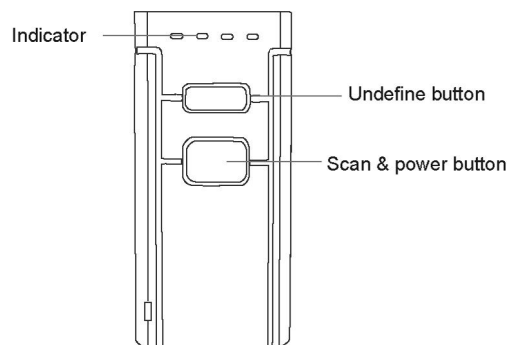

## 4 Pair for windows Android ,ios system

1.Install the battery and the Bluetooth barcode scanner will turn on automatically,press the "scan & power button" for about 8 seconds until the blue indicator light flashes rapidly,it will go into pairing mode.You also can scan the "pairing mode" barcode for pair directly

2.Open the bluetooth setting and find the bluetooth named "Gernal Bluetooth HID barcode scanner" and then pair.

3.After successful connect, the scanner will have a short beep sound, while the Indicator light don't flash anymore, and then it can be used normally. (during install,please don't use the scanner ,otherwise it maybe caused installing failed)

## 1 Pair for windows xp system

1.Install the battery and the Bluetooth barcode scanner will turn on automatically,press the "scan & power button" for about 8 seconds until the blue indicator light flashes rapidly,it will go into pairing mode.You also can scan the "pairing mode" barcode in the manual for pair directly

2.Plug in the Bluetooth receiver into the USB port of the computer and the receiver light will be on. And then it will install automatically.

3.When prompted that the new hardware is installed and can be used, open the "Start" menu in the lower left corner of computer , open the Control Panel to find the "Bluetooth" icon

4.Double-click the Bluetooth icon, and then click the "Add" button, select my device has been set up and ready ,and then click "Next"

5.Find the bluetooth named "Gernal Bluetooth HID barcode scanner" and the next step choose "do not use the password key", continue to click "Next."it will start installing

6.After successful connect, the scanner will have a short beep sound, while the Indicator light don't flash anymore, and then it can be used normally. (during install,please don't use the scanner ,otherwise it maybe caused installing failed)

## 2 Pair for windows 7 system

Notes: If your computer have Bluetooth function,you can pair it directly ,don't need do follow steps,if your computer Bluetooth function can't work, you need prohibit it first and then do follow steps.

1.Install the battery and the Bluetooth barcode scanner will turn on automatically,press the "scan & power button" for about 8 seconds until the blue indicator light flashes rapidly,it will go into pairing mode.You also can scan the "pairing mode" barcode for pair directly

2.Plug in the Bluetooth receiver into the USB port of the computer and the receiver light will be on. And then it will install automatically.

3.When the driver installation is complete, a Bluetooth icon appears in the lower right of your computer

4.Double-click the Bluetooth icon on the map or click the right button of the mouse to select "Add Device."

5.Find the bluetooth named "Gernal Bluetooth HID barcode scanner" and the next step choose "do not use the password key", continue to click "Next."it will start installing

6.After successful connect, the scanner will have a short beep sound, while the Indicator light don't flash anymore, and then it can be used normally.(during install,please don't use the scanner ,otherwise it maybe caused installing failed)

## 3 Pair for windows 8 windows 10 systemNotes:

If your computer have Bluetooth function,you can pair it directly ,don't need do follow steps,if your computer Bluetooth function can't work, you need prohibit it first and then do follow steps.

1.Install the battery and the Bluetooth barcode scanner will turn on automatically,press the "scan & power button" for about 8 seconds until the blue indicator light flashes rapidly,it will go into pairing mode.You also can scan the "pairing mode" barcode for pair directly

2.Plug in the Bluetooth receiver into the USB port of the computer and the receiver light will be on. It will install automatically.

3.Open the bluetooth setting and find the bluetooth named "Gernal Bluetooth HID barcode scanner" and then pair.

4.After successful connect, the scanner will have a short beep sound, while the Indicator light don't flash anymore, and then it can be used normally. (during install,please don't use the scanner ,otherwise it maybe caused installing failed)

## Barcode mode feature set



pairing mode  
scan this barcode to pair directly



Serial mode



HID (USB) mode



Normal mode

This is the default mode ,when you scan it upload directly.



No data loss mode  
If the bluetooth disconnect Suddenly,the data will stock directly,when it connect again ,the data will update automatically,



SPP mode



Inventory mode  
under this mode ,it can stock a lot of bar codes,and when you want upload the data just scan the data upload mode,then all the data will update,



The total number of data



Data Upload



clear data



IOS show hidden keyboard



IOS keyboard keys,  
double-click Show hidden



Barcode tone sweep to open



Barcode sweep tone Close



Barcode Upload tone open



Barcode Upload tone Close



Turn off Mode  
if you want turn off the barcode scanner ,scan this bar code



Bluetooth restore  
factory settings



Close the sound



enable soundC



Hardware version  
information



Software version  
information



Warning!

Barcode above Use with caution

## Sleep Time Setting

Please scan the "start setting" barcode and then scan the time barcode.



Start setting



5 of 5 stars



30 seconds



60 seconds



2 minutes



10 points



20 points



No scanner sleep mode

## Language selection (default American English)



American English



French



German



Italian language



Russian

## Buzzer

### Buzzer mode and description

Blew two seconds:

Bluetooth module initialization error, external EEPROM full

3 sounding voice:

Low battery, the battery voltage is lower than 3.2V

Short beeps 20 times:

External memory initialization error, external EEPROM read and write errors

Short beeps 1:

Upload Start upload OK, set the Start, Settings OK

Short beeps twice:

Power-OK, RF transmission OK (gun Bluetooth connection is successful)

Short beeps 3 times:

Bluetooth error (Bluetooth connection failed gun)

Short beeps five times:

Setting error, matching error

## LED lights

### LED color and description

Green light and quickly extinguished:

Successfully read the bar code, also issued short beeps

Two blue lights flashing together:

Enter the pattern, waiting for a terminal connected to the device

A blue light flashes:

Enter the pattern, waiting for a terminal connected to the device

A steady blue light:

Successful match and connect the device, while short beeps twice

Red light:

State of charge

Flashing red:

Battery connection is bad

## Troubleshooting on using this barcodescanner

- ▶ **My android cellphone can't connect?**  
Please check your android cellphone bluetooth version over 3.0 or not ,if the version over 3.0 it can connect directly
- ▶ **Why some part of the barcode can't scan?**  
Some of special barcode don't open at the factory default setting ,if you have some barcode can't scan ,please contact us at [ocom@ocominc.com](mailto:ocom@ocominc.com)
- ▶ **After pair ,it can't upload the data?**  
Make sure the pair success or not.if success,the blue indicator light don't flash anymore.  
Also please check whether open the Inventory mode,if open the Inventory mode,please scan the normal model.
- ▶ **Can't connect after Insert the Bluetooth adapter again or restart the cellphone?**  
Try to restart the barcode scanner
- ▶ **Why can't connect after from SPP mode switch to HID mode?**  
Please make sure whether use HID Mode before ,if yes ,please ignore the bluetooth name in bluetooth setting ,and pair again.
- ▶ **I want some special setting,like prefix ,how can i do?**  
Please contact us at [ocom@ocomincl.com](mailto:ocom@ocomincl.com).
- ▶ **Sometimes the cover can't open?**  
Only some of them maybe very tight ,please try more times.
- ▶ **Can this also be connected directly with a usb cable?**  
Hi ,it can't,it is bluetooth wireless barcode scanner
- ▶ **How many barcodes reads can this store? Want to take inventory of my store without pairing to device, then when done transfer scanned codes to device?**  
Hi ,it about 5000 barcodes

- ▶ **How do i do a factory reset if it doesnt scan any barcodes from the manual?**  
Hi ,if need factory reset ,please contact us at [ocom@ocomincl.com](mailto:ocom@ocomincl.com)
- ▶ **Can it read barcodes off of a screen or only printed?**  
Only printed, we have another one which can scan the code on screen
- ▶ **How long is the warranty?**  
All products come with 12 months full warranty from the date of its original purchase.

## About us

OCOM is a leading consumer electronics brand . We specialize in Consumer Electronics. We pride ourselves on understanding what consumers need and how to fulfill their demands. Since 2007, OCOM has enjoyed years of continuous growth thanks to millions of satisfied customers around the world.

We look into the latest innovations and find products that can connect with our daily life; ideas that can make our routine tasks easier; technologies that truly enhance our activities.

### Share us

If you love our products , please share your experience to facebook ,youtube ,pinterest, Slideshare etc

### After service

All products offer 1 year warranty, if you need any help about our product, please feel free to contact us at [ocom@ocominc.com](mailto:ocom@ocominc.com).

### Suggestion

If you have any good idea or suggestion about this product ,please feel free to contact us at [ocom@ocominc.com](mailto:ocom@ocominc.com)