

## 80MM Bezprzewodowy Z Auto CutterPoz Drukarka termiczna

### (Model OCPP- 806-W)

#### Specyfikacja:

|                                  |   |
|----------------------------------|---|
| Metoda drukowania                | termiczna   |
| Druk Postać                      | 576 punktów / linia, 512 punktów linii, znaków / ANK  |
| Czcionka                         | ZA: 12 * 24dots, 1,5 (w) * 3,0 (H) mm;<br>B: 9 * 17dots, 1,1 (W) x 2,1 mm (H)                                 |
| Uproszczony / Tradycyjny chiński | 24 * 24dots, 3,0 (W) * 3,0 (H) mm   |
| Rodzaj kodu kreskowego           | UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) CODABAR / ITF / CODE39 / CODE93 / CODE128, Kod QR                 |
| prędkość druku                   | 300 mm / s  |
| Berło                            | Wi-Fi + USB   |
| Druk Rozkaz                      | Zgodny z ESC / POS  |
| sterowniki                       | Win9x / Win2000 // Win2003 / Win Vista / Win 7 / Windows XP / Windows 8 / Win10 / Linux, kompatybilny z ESPON |
| Szerokość druku                  | 79,5 ± 0,5 mm ( 72mm szerokość druku)   |
| Srednica papieru                 | 83mm  |
| Papier Grubość                   | 0.06-0.08mm   |
| Nóż                              | Auto frez   |
| Druk Niezawodność                | 100 km  |
| Moc                              | DC24V / 2.5A  |
| Temperatura                      | 0-45 stopni   |
| Kontrast Wilgotność              | 10-80%  |
| Zewnętrzny Wymiar                | 195D * 155W * 148H mm   |
| Waga brutto                      | 2,70 kg   |
| Pakiet                           | Wewnątrz pudło: 29 * 21 * 17 cm; Wielkość kartonu (8 sztuk) 60 * 44 * 36 (cm)                                 |

#### Szczegóły Produktu:



**80mm Thermal Receipt  
Printer with auto-cutter  
OCPP-806**



**Product Picture**





## Features

**Simple but not easy**



Water-proof and grease-proof.



- Support NV image downloading and printing
- Support different density bitmap graphics printing



Support raster bitmap printing



USB+Serial +Ethernet  
or WIFI+USB+LAN



High Printing Speed  
(Max 260mm/second)  
Auto Cutter Optional



Characters can be amplified, printed in bold optionally, and line spacing printing can be adjusted



## All-round show





## Application Area

Food delivery, restaurant, Traffic Citation, Logistics,  
Transportation, Warehouse management, Delivery, Illegal  
Parking Ticket, Drugstore, Price Tag, Retail/Farm



## Parameter

|                                |  |
|--------------------------------|--|
| Printing Method                | Direct Thermal   |
| Printing Character             | 576 dots/line, 512 dots/line, ANK characters                               |
| Font                           | A: 12*24dots, 1.5(W)*3.0(H)mm;<br>B: 9*17dots, 1.1(W)*2.1(H)mm             |
| Simplified/Traditional Chinese | 24*24dots, 3.0(W)*3.0(H)mm   |
| Barcode Type                   | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)CODABAR/ITF/CODE39/CODE93/CODE128       |
| Printing Speed                 | 300mm/sec  |
| Interface                      | Wifi + USB   |
| Printing Command               | Compatible with ESC/POS  |
| Drivers                        | Win9X/Win2000/Win2003/Win Vista/ Win 7/Window XP /, compatible with ESPON, |
| Printing Width                 | 79.5±0.5mm( print width 72mm)  |
| Paper Diameter                 | 83mm   |
| Paper Thickness                | 0.06-0.08mm  |
| Cutter                         | Auto cutter  |
| Printing Reliability           | 100km  |
| Power                          | DC24V/2.5A   |
| Temperature                    | 0-45 degree  |
| Contrast Humidity              | 10-80%   |
| External Dimension             | 195D*155W*148H mm  |
| Gross Weight                   | 2.70kg   |
| Package                        | Inner Box: 29*21*17cm; Carton Size (8 pcs): 60*44*36(cm)                   |

## Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.
- E Tear-off the paper correctly.

---

### Setting the Printing Mode(DIP switches):

The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.






1. Remove the DIP switches cover on the bottom of the printer.




2. DIP switches setting




## Connection


a

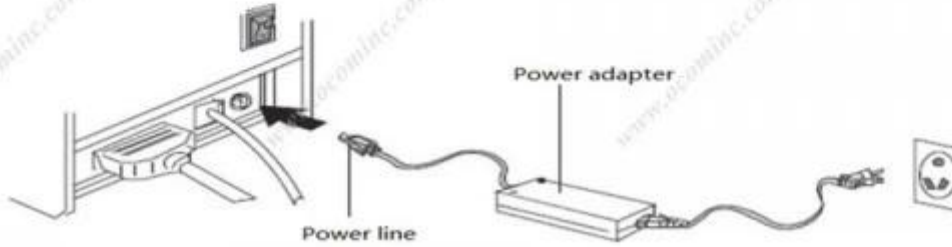

b

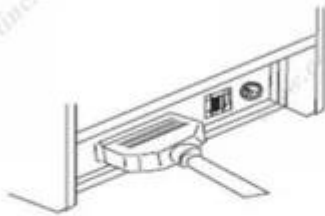

c

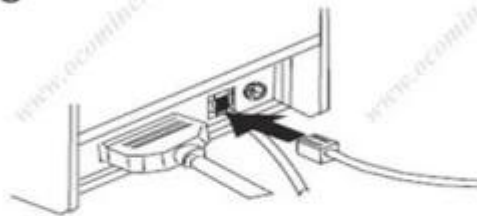

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- c. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

## Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow
8. L/C

## Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

For more information, please contact us at [info@ocom.com](mailto:info@ocom.com)

You can find more information of us at: [www.ocominc.com](http://www.ocominc.com),  
Together we quest for the best.



## **Odpowiednie dokumenty:**

[\\*Specyfikacja](#)

[\\*Podręcznik programu](#)

[\\*Instrukcja obsługi](#)

[\\*Sterownik dla wiatremOVS](#)

[\\*Sterownik dla systemu Linux](#)

[\\*Parametry Printer Setting Tools](#)

[\\*Printdemo USB\(Application Software demo\)](#)

[\\*Bluetooth Printdemo\(Application Software demo\)](#)

[\\*Wifi Demo drukarki\(Application Software demo\)](#)

[\\*SDK dla Android](#)

[\\*Płyta CD Akta](#)