

# Hand held 2D Barcode Scanner

(M/N: OCBS-2012)

## Feautre:

- n High performance imaging technology;
- n Omni-directional scanning, easy to scan;
- n High compatibility for all major 1D and 2D symbols;
- n Can read the barcode on the screen and color barcode;
- n 5mil excellent scanning accuracy(Can be customized as required) ;
- n Multi special function setting supported;
- n Multi interfaces optional;

## Specification:

Performance Characteristics		
Resolution		640 * 480, 256 gray levels
Light Source		LED(617 nm ± 10 nm)
Illumination		0 ~ 100,000 LUX
Scan angle		Roll 360°\Pitch ±60°\Skew ±65°
Scanning Speed		300scan/s
Symbology	2D	DataMatrix, Matrix 2 of 5, MaxiCode, MicroPDF417, MSI Code, PDF417, QR code, Standard 2 of 5, Telepen, TLC 39, etc.
	1D	Australian Post, Aztec, BPO, Canada Post, Codabar, Codablock, Code 11, Code 39, Code 93, Code 128/EAN128, Dutch Post, EAN.UCC Composite, Interleaved 2 of 5, Japan Post, Planet, Plessey Code, Postnet, RSS, UPC/EAN,etc.
Precision		≥ 5mil Can be customized as required
Roll		360°
Pitch		65°
Skew		75°
Physical Characteristics		
Interface		RS232 / USB/USB virtual COM
Voltage		DC 5 V ± 5%
Current		190 mA (working)
Cable		1.5m
Weight		165g
Dimensions		170 mm x 60 mm x95mm
User Environment		
Operate Temperature		-5°C to 65°C
Storage Temperature		-20°C to 70°C
Humidity		5% - 95%(non-condensing)
Shock		Drop from 150 cm to concrete floor



OCBS-2012






# OCBS-2012





OCBS-2012

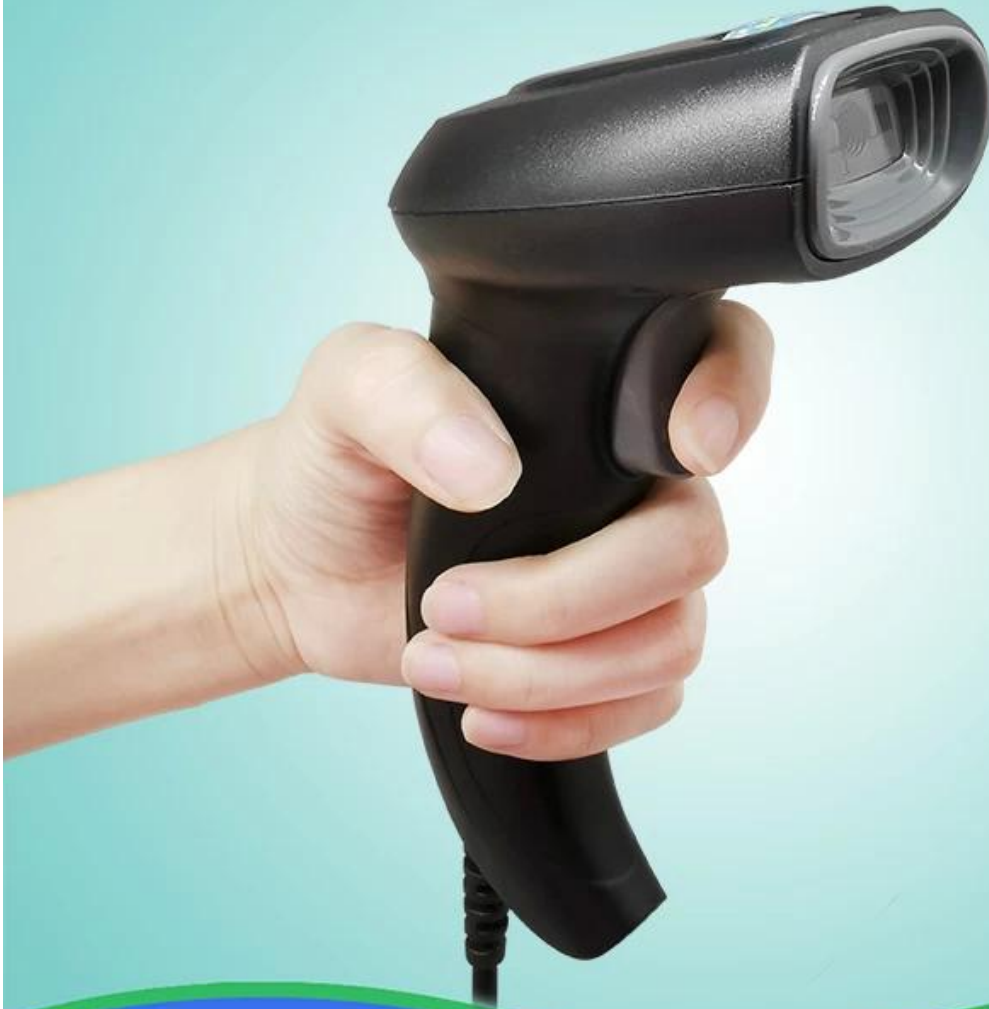



OCBS-2012





OCBS-2012

