High Cost-effective 1D/2D Barcode Scanner

(Model No.: OCBS-2017)

Feature:



High performance imaging technology;

Omni-directional scanning;

4 mil excellent scanning accuracy;

Multi special function setting supported;

High compatibility for all major 1D and 2D symbols;

Can read the barcode on the screen and color barcode.

Specification:

General	
Model	OCBS-2017
Color	Black
Material	ABS+PC
Processor	32-bit ARM MCU + DSP
Interface	USB; USB virtual COM; RS232
Prompt mode	Buzzer, indicator(LED)
IP grade	IP42
Power consumption	375mW(Working);226mW(standy);750mW(Max)
Power supply	DC 5V ±5%
OS support	Linux Android Windows XP T B Linux B Linx B Linux B Linx B Linux B Linux B Linux B Linx B
Performance	
Sensor	CMOS
Light source	Red LED(Aiming)+White LED(Lighting)
Resolution	≥4mil[]PCS90%,CODE 39[]
Error rate	1/5 million
Motion Tolerance	25cm/s
Reading Mode	Image
Trigger mode	Manual,Continuous scanning,Auto-sensing
ESD Protection	15KV air discharge
Shock resistance	1.5m free fall on concrete surface
Symbolic contrast	≥25%
Barcodes	1D:Code25-Interleaved , Code25-Standard , Code25-Matrix , Code39-Regular, Code39-FullASCII, Code32, Code93-Regular, Code93-FullASCII, Code128, EAN/GSL/UCC-128Auto ,Codabar,MSI ,EAN/JAN-13,UPC-A,JAN-8,UPCE 2D:PDF417, QR Code, Data Matrix
Reading depth	Code39 4.17mil(15bytes):4cm-8cm Code128 4.17mil(16bytes):7cm-15cm Data Matrix 10.83mil(8 bytes):3cm-9cm Code QR 10.83mil(8 bytes):7cm-12cm
Scanning Angle	Roll360°,Pitch30°,Yaw45°
Physical	
Weight	Net:320g Gross: 400g
Package box	195*105*80mm
30 in 1 carton	570*430*280mm/7.0kg
Environment	
Working temperature& humidity	0 to 45 degrees centigrade, 10%~80% No condensation



Multisystem Compatibility

Compatible with XP/Win7/Win8/Win9/Win10/Win11/Android/Mac osx/Linux





Superior Decoding Capability

Support mainstream 2D/full 1D/screen bar codes













Shock Buffering

Designed to withstand 1.5m drops




Dimensions









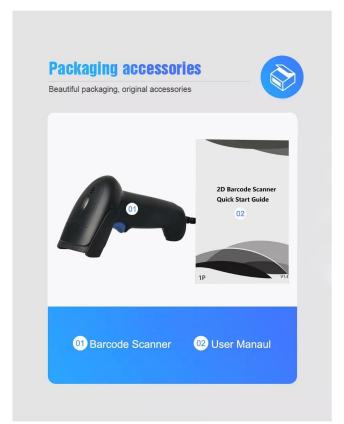

Exterior	Model	Decoding Capability	Interface	Reading Mode
	OCBS-2017	1D 2D Screen	USB Wired	CMOS
P	OCBS-W217	1D 2D Screen	USB Wired 2.4G Wireless	CMOS
	OCBS-C017	1D Screen	USB Wired	CCD
	OCBS-L017	<u>()</u> 1D	USB Wired	Laser











Click here

Customized Your LOGO



Customized Your Packaging







CERTIFICATE SOCE FC ...



OUR COMPANY











Customer Solid-Base



Well Received By Customers

