

Win 8 Compatible Retail Use 2 Inches Thermal Receipt Printer (Model: OCPP-582)

Specification:

Printing method	Direct thermal
Print font	FONT A: 33 or 35; FONT B: 40 or 42
Character size	Font A : 12 × 24; Font B : 9 × 17; Chinese: 24 X 24
Barcode	JAN13□EAN13□JAN8□EAN8□CODE39
Printing command	compatible with EPSON ESC/POS
Language	Buyer language support
Character per line	384dots/line (203DPI)
Printing speed	90mm/sec
Paper width	57.5±0.5mm
Paper thickness	0.06-0.08mm
MCBF(life)	50km
Dimension	235X145X125mm
Gross weight	2.6KG
Auto cutter	manual cutter
Sensor	Paper Near End Sensor, Paper End Sensor, Cover open sensor
Roll paper	φ65mm
Interface	Parallel, USB, LAN
Driver	Win 9X/Win ME/Win 2000/Win 2003/Win NT/Win XP/Win Vista/Win 7/Linux
Power supply	DC12V/3A

Product Details:



58mm Thermal Receipt Printer

OCPP-582



Product Picture





Features

Simple but not easy

High speed, long lifetime, high quality,
low repair rate, applicable for various
software





Modern design, easy to use



Support Logo download printing



GB2312 Chinese Character Library
Support Simplified Chinese/traditional
Chinese and various international
languages



100MB Ethernet interface, quicker link and print, avoid losing the order



All-round show





Application Area

Food delivery, restaurant, Traffic Citation, Logistics, Transportation, Warehouse management, Delivery, Illegal Parking Ticket, Drugstore, Price Tag, Retail/Farm



Parameter


Printing method	Direct thermal
Print font	FONT A: 33 or 35; FONT B: 40 or 42
Character size	Font A : 12 × 24; Font B : 9 × 17; Chinese: 24 X 24
Barcode	JAN13 (EAN13) JAN8 (EAN8) CODE39
Printing command	compatible with EPSON ESC/POS
Language	Buyer language support
Character per line	384dots/line (203DPI)
Printing speed	90mm/sec
Paper width	57.5±0.5mm
Paper thickness	0.06-0.08mm
MCBF(life)	50km
Dimension	235X145X125mm
Gross weight	2.6KG
Auto cutter	manual cutter
Sensor	Paper Near End Sensor, Paper End Sensor, Cover open
Roll paper	φ65mm
Interface	Parallel, USB, LAN
Driver	Win 9X/Win ME/Win 2000/Win 2003/Win NT/Win XP/Win Vista/Win 7/Linux


Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.
- E Tear-off the paper correctly.

Connection

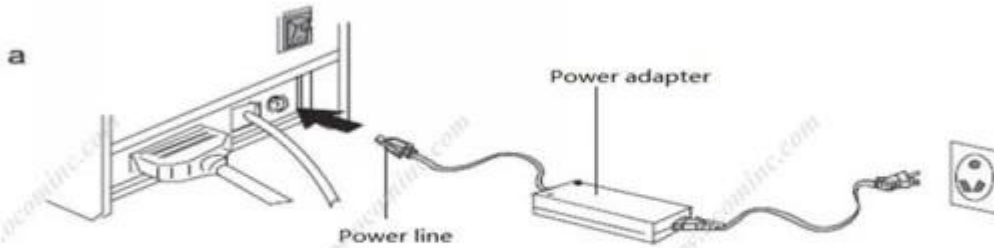



- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- C. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow
8. L/C

Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.





We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com,
Together we quest for the best.

